arXiv:1405.3017v1 [cs.SE] 13 May 2014

Formalisation and Analysis of Component Dependencies

Maria Spichkova

May 14, 2014

Abstract

This set of theories presents a formalisation in Isabelle/HOL+Isar of data dependencies between components. The approach allows to analyse system structure oriented towards efficient checking of system: it aims at elaborating for a concrete system, which parts of the system (or system model) are necessary to check a given property.

Contents

1 Introduction **2**

2 Case Study: Definitions **7**

3 Inter-/Intracomponent dependencies **14**
3.1 Direct and indirect data dependencies between components . 18
3.2 Components that are elementary wrt. data dependencies . . . 25
3.3 Set of components needed to check a specific property 26
3.4 Additional properties: Remote Computation 29

4 Case Study: Verification of Properties **29**
4.1 Correct composition of components 29
4.2 Correct specification of the relations between channels 34
4.3 Elementary components 39
4.4 Source components 41
4.5 Minimal sets of components to prove certain properties . . . 57

1 Introduction

The set of theories presented in this paper is an Isabelle/HOL+Isar [6, 13] formalisation of data dependencies between components. This paper is organised as follows: first of all we give a general introduction to our approach for analyse system structure analysis oriented towards efficient checking of system: it aims at elaborating for a concrete system, which parts of the system (or system model) are necessary to check a given property. After that we present the Isabelle/HOL representation of these concepts and a small case study, where the dependency properties are verified formally using the Isabelle theorem prover also applying its component Sledgehammer [1, 2].

In general, we don't need complete information about the system as to check its certain property. An additional information about the system can slow the whole process down or even make it infeasible. In this theory we define constraints that allow to find/check the minimal model (and the minimal extent of the system) needed to verify a specific property. Our approach focuses on data dependencies between system components. Dependencies' analysis results in a decomposition that gives rise to a logical system architecture, which is the most appropriate for the case of remote monitoring, testing and/or verification.

Let *CSet* be a set of components on a certain abstraction level L of logical architecture (i.e. level of refinement/decomposition, data type *AbstrLevelsID* in our Isabelle formalisation). We denote the sets of input and output streams of a component S by $\mathbb{I}(S)$ (function *IN :: CSet ⇒ chanID set* in Isabelle) and $\mathbb{O}(S)$ (function *OUT :: CSet ⇒ chanID set* in Isabelle). The set of local variables of components is defined in Isabelle by VAR, and the function to map component identifiers to the corresponding variables is defined by *VAR :: CSet ⇒ varID set*.

Please note that concrete values for these functions cannot be specified in general, because they strongly depend on a concrete system. In this paper we present a small case study in the theories *DataDependenciesConcreteValues.thy* (specification of the system architecture on several abstraction levels) and *DataDependenciesCaseStudy.thy* (proofs of system architectures' properties).

Function *subcomp :: CSet ⇒ CSet set* maps components to a (possibly empty) set of its subcomponents.

We specify the components' dependencies by the function

$$Sources^L : CSet^L \to (CSet^L)^*$$

which returns for any component identifier A the corresponding (possibly empty) list of components (names) $B_1, \ldots, B_{AN}$ that are the sources for the input data streams of A (direct or indirect):

$$Sources^L(C) = \\ DSources^L(C) \ \cup \ \bigcup_{S \in DSources^L(C)} \{S_1 \mid S_1 \in Sources^L(S)\}$$

Direct data dependencies are defined by the function

$$DSources^L : CSet^L \to (CSet^L)^*$$

$$DSources^L(C) = \{S \mid \exists x \in \mathbb{I}(C) \wedge x \in \mathbb{O}(S)\}$$

For example, $C_1 \in DSources^L(C_2)$ means that at least one of the output channels of C_1 is directly connected to some of input channels of C_2.

$\mathbb{I}^{\mathcal{D}}(C, y)$ denotes the subset of $\mathbb{I}(C)$ that output channel y depends upon, directly (specified in Isabelle by function *OUTfromCh:: chanID ⇒ chanID set* or vial local variables (specified by function *OUTfromV:: chanID ⇒ varID set*). For example, let the values of the output channel y of component C depend only on the value of the local variable *st* that represents the current state of C and is updated depending to the input messages the component receives via the channel x, then $\mathbb{I}^{\mathcal{D}}(C, y) = \{x\}$. In Isabelle, $\mathbb{I}^{\mathcal{D}}(C, y)$ is specified by function *OUTfrom:: chanID ⇒ varID set*.

Based on the definition above, we can decompose system's components to have for each component's output channel the minimal subcomponent computing the corresponding results (we call them *elementary components*). An elementary component either

- should have a single output channel (in this case this component can have no local variables), or
- all it output channels are correlated, i.e. mutually depend on the same local variable(s).

If after these steps a single component is too complex, we can apply the decomposition strategy presented in [11]. The result of the decomposition can be seen as a compositional refinement of the system [3].

For any component C, the dual function $\mathbb{O}^{\mathcal{D}}$ returns the corresponding set $\mathbb{O}^{\mathcal{D}}(C, x)$ of output channels depending on input x. This is useful for tracing, e.g., if there are some changes in the specification, properties, constraints, etc. for x, we can trace which other channels can be affected by these changes.

If the input part of the component's interface is specified correctly in the sense that the component does not have any "unused" input channels, the following relation will hold: $\forall x \in \mathbb{I}(C).\ \mathbb{O}^{\mathcal{D}}(C, x) \neq \emptyset$. We illustrate the presented ideas by a small case study: we show how system's components can be decomposed to optimise the data dependencies within each single component, and after that we optimise architecture of the whole system. System S (cf. also Fig. 1) has 5 components, the set $CSet$ on the level L_0 is defined by $\{A_1, \ldots, A_9\}$. The sets $\mathbb{I}^{\mathcal{D}}$ of data dependencies between the components are defined in the theory *DataDependenciesConcreteValues.thy*. We represent the dependencies graphically using dashed lines over the component box.

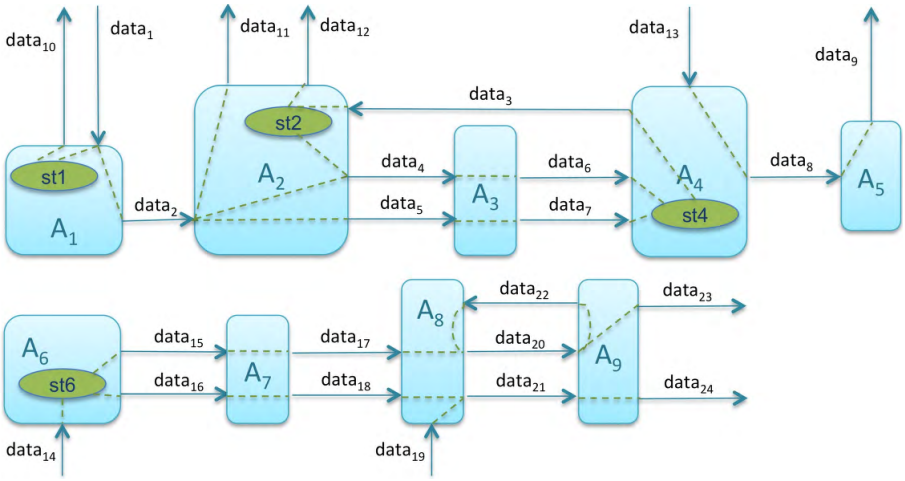

Figure 1: System S: Data dependencies and $\mathbb{I}^{\mathcal{D}}$ sets

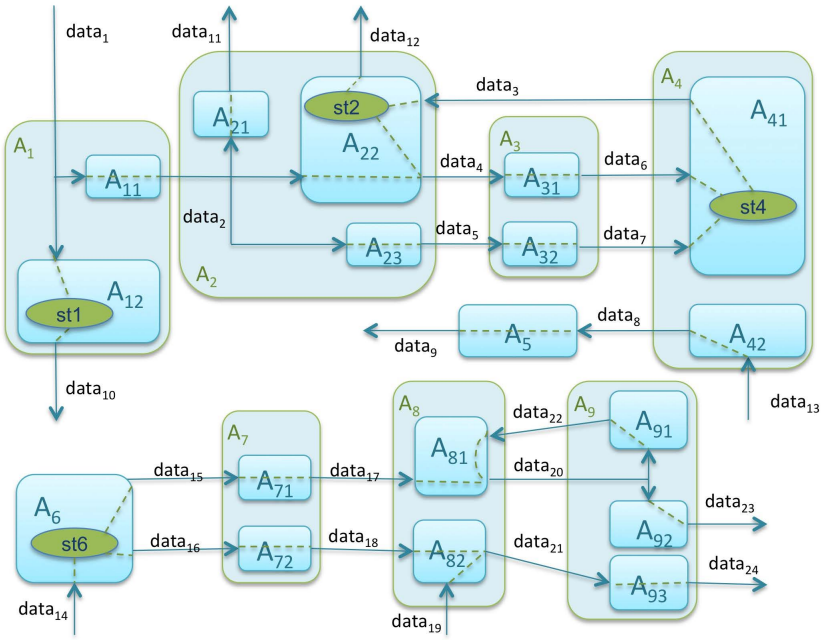

Figure 2: Components' decomposition (level L_1)

Now we can decompose the system's components according to the given $\mathbb{I}^{\mathcal{D}}$ specification. This results into the next abstraction level L_1 of logical architecture (cf. Fig. 2), on which all components are elementary. Thus, we obtain a (flat) architecture of system. The main feature of this architecture is that each output channel (within the system) belongs the minimal subcomponent of a system computing the corresponding results. We represent this (flat) architecture as a directed graph (components become vertices and channels become edges) and apply one of the existing distributed algorithms for the decomposition into its strongly connected components, e.g. FB [5], OBF [4], or the colouring algorithm [7]. Fig. 3 presents the result of the architecture optimisation.

After optimisation of system's architecture, we can find the minimal part of the system needed to check a specific property (cf. theory *DataDependencies*). A property can be represented by relations over data flows on the system's channels, and first of all we should check the property itself, whether it reflect a real relation within a system. Let for a relation r, I_r O_r be the sets of input and output channels of the system used in this relation. For each channel from O_r we recursively compute all the sets of the dependent components and corresponding input channels. Their union, restricted to the input channels of the system, should be equal to I_r, otherwise we should check whether the property was specified correctly.

Thus, from O_r we obtain the set $outSetOfComponents$ of components having these channels as outputs, and compute the union of corresponding sources' sets. This union together with $outSetOfComponents$ give us the minimal part of the system needed to check the property r: we formalise it in Isabelle by the predicate $minSetOfComponents$.

On the verification level this formalization is combinable with the Isabelle/HOL+Isar formalisation of stream processing components [9], which aim is analysis of functional properties of systems and its components also using the idea of refinement-based verification [12].

For each channel and elementary component (i.e. for any component on the abstraction level L_1) we specify the following measures:

- measure for costs of the data transfer/ upload to the cloud *UplSize(f)*: size of messages (data packages) within a data flow f and frequency they are produced. This measure can be defined on the level of logical modelling, where we already know the general type of the data and can also analyse the corresponding component (or environment) model to estimate the frequency the data are produced;

- measure for requirement of using high-performance computing and cloud virtual machines, *Perf(X)*: complexity of the computation within a component X, which can be estimated on the level of logical modelling as well.

On this basis, we build a system architecture, optimised for remote computation. The *UplSize* measure should be analysed only for the channels that aren't local for the components on abstraction levels L_2 and L_3.

Using graphical representation, we denote the channels with *UplSize* measure higher than a predefined value by thick red arrows (cf. also set *UplSizeHighLoad* in Isabelle theory *DataDependenciesConcreteValues.thy*), and the components with *Perf* measure higher than a predefined value by light green colour (cf. also set *HighPerfSet* in Isabelle theory *DataDependenciesConcreteValues.thy*), where all other channel and components are marked blue.

Fig. 4 represents a system architecture, optimised for remote computation: components from the abstraction level L_2 are composed together on the abstraction level L_3, if they are connected by at least one channel with *UplSize* measure higher than a predefined value. The components S'_4 and S'_7 have *Perf* measure higher than a predefined value, i.e. using high-performance computing and cloud virtual machines is required.

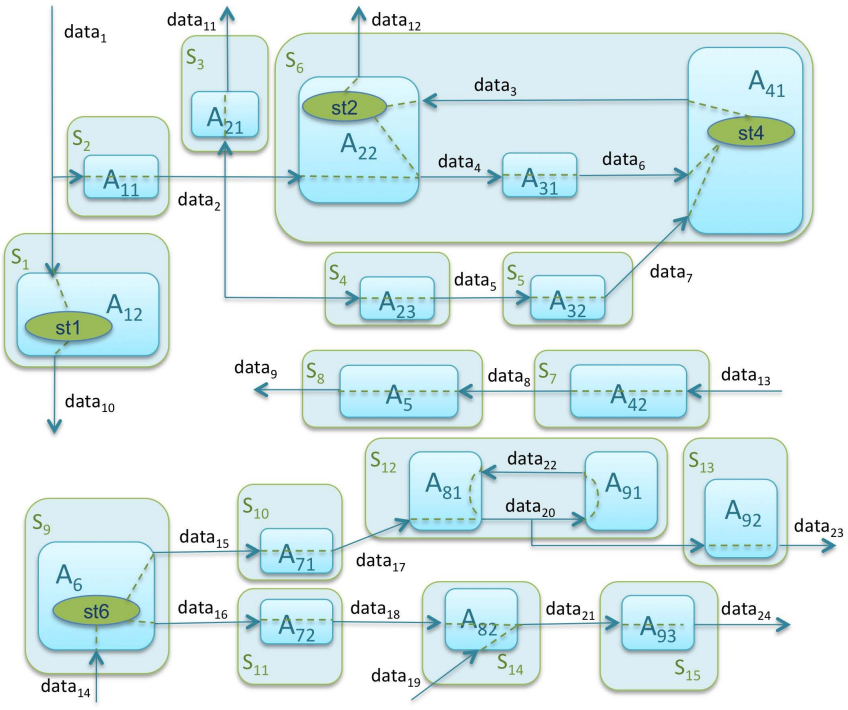

Figure 3: Architecture of S (level L_2)

This approach can be used as a basis for the abstract modelling level within the development of cyber-physical systems, suggested in our previous work [10, 8].

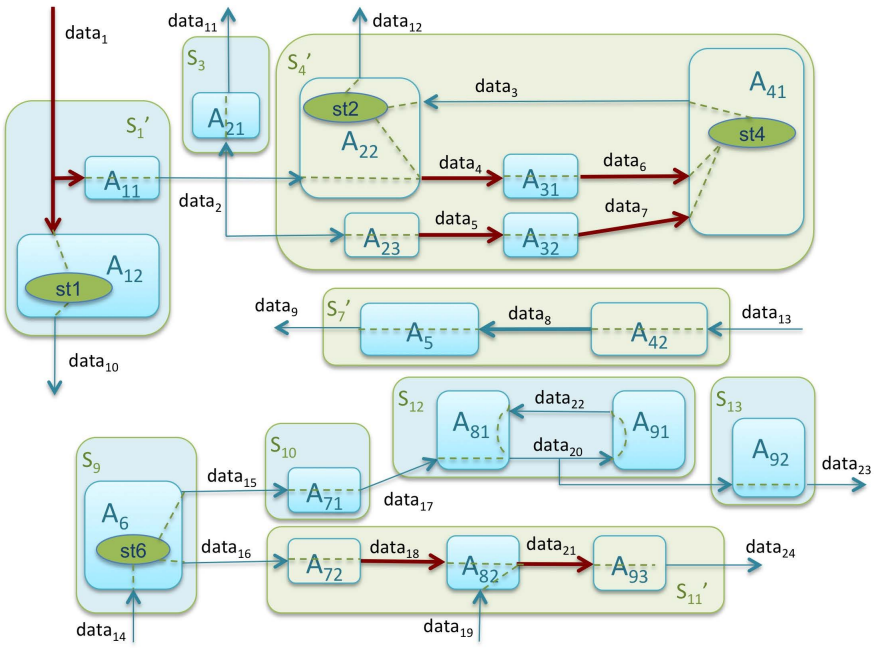

Figure 4: Optimised architecture of S (Level L_3)

2 Case Study: Definitions

theory *DataDependenciesConcreteValues*
imports *Main*
begin

datatype *CSet* = *sA1*| *sA2*| *sA3*| *sA4*| *sA5*| *sA6*| *sA7*| *sA8*| *sA9*|
sA11| *sA12*| *sA21*| *sA22*| *sA23*| *sA31*| *sA32*| *sA41*| *sA42*|
sA71| *sA72*| *sA81*| *sA82*| *sA91*| *sA92*| *sA93*|
sS1| *sS2*| *sS3*| *sS4*| *sS5*| *sS6*| *sS7*| *sS8*| *sS9*| *sS10*| *sS11*|
sS12 |*sS13*| *sS14*| *sS15*| *sS1opt* | *sS4opt* | *sS7opt* | *sS11opt*

datatype *chanID* = *data1*| *data2*| *data3*| *data4*| *data5*| *data6*| *data7*|
data8| *data9*| *data10*| *data11*| *data12*| *data13*| *data14*| *data15*|
data16| *data17*| *data18*| *data19*| *data20*| *data21*| *data22*| *data23*| *data24*

datatype *varID* = *stA1* | *stA2* | *stA4* | *stA6*

datatype *AbstrLevelsID* = *level0* | *level1* | *level2* | *level3*

— function IN maps component ID to the set of its input channels
fun *IN* :: *CSet* ⇒ *chanID set*
where

$$
\begin{aligned}
& IN\ sA1 = \{\ data1\ \} \\
| \ & IN\ sA2 = \{\ data2,\ data3\ \} \\
| \ & IN\ sA3 = \{\ data4,\ data5\ \} \\
| \ & IN\ sA4 = \{\ data6,\ data7,\ data13\ \} \\
| \ & IN\ sA5 = \{\ data8\ \} \\
| \ & IN\ sA6 = \{\ data14\ \} \\
| \ & IN\ sA7 = \{\ data15,\ data16\ \} \\
| \ & IN\ sA8 = \{\ data17,\ data18,\ data19,\ data22\ \} \\
| \ & IN\ sA9 = \{\ data20,\ data21\ \} \\
| \ & IN\ sA11 = \{\ data1\ \} \\
| \ & IN\ sA12 = \{\ data1\ \} \\
| \ & IN\ sA21 = \{\ data2\ \} \\
| \ & IN\ sA22 = \{\ data2,\ data3\ \} \\
| \ & IN\ sA23 = \{\ data2\ \} \\
| \ & IN\ sA31 = \{\ data4\ \} \\
| \ & IN\ sA32 = \{\ data5\ \} \\
| \ & IN\ sA41 = \{\ data6,\ data7\ \} \\
| \ & IN\ sA42 = \{\ data13\ \} \\
| \ & IN\ sA71 = \{\ data15\ \} \\
| \ & IN\ sA72 = \{\ data16\ \} \\
| \ & IN\ sA81 = \{\ data17,\ data22\ \} \\
| \ & IN\ sA82 = \{\ data18,\ data19\ \} \\
| \ & IN\ sA91 = \{\ data20\ \} \\
| \ & IN\ sA92 = \{\ data20\ \} \\
| \ & IN\ sA93 = \{\ data21\ \} \\
| \ & IN\ sS1 = \{\ data1\ \} \\
| \ & IN\ sS2 = \{\ data1\ \} \\
| \ & IN\ sS3 = \{\ data2\ \} \\
| \ & IN\ sS4 = \{\ data2\ \} \\
| \ & IN\ sS5 = \{\ data5\ \} \\
| \ & IN\ sS6 = \{\ data2,\ data7\ \} \\
| \ & IN\ sS7 = \{\ data13\ \} \\
| \ & IN\ sS8 = \{\ data8\ \} \\
| \ & IN\ sS9 = \{\ data14\ \} \\
| \ & IN\ sS10 = \{\ data15\ \} \\
| \ & IN\ sS11 = \{\ data16\ \} \\
| \ & IN\ sS12 = \{\ data17\} \\
| \ & IN\ sS13= \{\ data20\ \} \\
| \ & IN\ sS14 = \{\ data18,\ data19\ \} \\
| \ & IN\ sS15 = \{\ data21\ \} \\
| \ & IN\ sS1opt = \{\ data1\ \} \\
| \ & IN\ sS4opt = \{\ data2\ \} \\
| \ & IN\ sS7opt = \{\ data13\ \} \\
| \ & IN\ sS11opt = \{\ data16,\ data19\ \}
\end{aligned}
$$

— function OUT maps component ID to the set of its output channels
fun *OUT* :: *CSet* ⇒ *chanID set*
where
  OUT sA1 = { *data2*, *data10* }
| *OUT sA2* = { *data4*, *data5*, *data11*, *data12* }
| *OUT sA3* = { *data6*, *data7* }
| *OUT sA4* = { *data3*, *data8* }
| *OUT sA5* = { *data9* }
| *OUT sA6* = { *data15*, *data16* }
| *OUT sA7* = { *data17*, *data18* }
| *OUT sA8* = { *data20*, *data21* }
| *OUT sA9* = { *data22*, *data23*, *data24* }
| *OUT sA11* = { *data2* }
| *OUT sA12*= { *data10* }
| *OUT sA21* = { *data11* }
| *OUT sA22* = { *data4*, *data12* }
| *OUT sA23* = { *data5* }
| *OUT sA31*= { *data6* }
| *OUT sA32* = { *data7* }
| *OUT sA41* = { *data3* }
| *OUT sA42* = { *data8* }
| *OUT sA71* = { *data17* }
| *OUT sA72* = { *data18* }
| *OUT sA81* = { *data20* }
| *OUT sA82* = { *data21* }
| *OUT sA91* = { *data22* }
| *OUT sA92* = { *data23* }
| *OUT sA93* = { *data24* }
| *OUT sS1* = { *data10* }
| *OUT sS2* = { *data2* }
| *OUT sS3* = { *data11* }
| *OUT sS4* = { *data5* }
| *OUT sS5* = { *data7* }
| *OUT sS6* = { *data12* }
| *OUT sS7* = { *data8* }
| *OUT sS8* = { *data9* }
| *OUT sS9* = { *data15*, *data16* }
| *OUT sS10* = { *data17* }
| *OUT sS11* = { *data18* }
| *OUT sS12* = { *data20*}
| *OUT sS13*= { *data23* }
| *OUT sS14* = { *data21* }
| *OUT sS15* = { *data24* }
| *OUT sS1opt* = { *data2*, *data10* }
| *OUT sS4opt* = { *data12* }
| *OUT sS7opt* = { *data9* }
| *OUT sS11opt* = { *data24* }

— function VAR maps component IDs to the set of its local variables
fun *VAR* :: *CSet* ⇒ *varID set*
where
VAR sA1 = { *stA1* }
| *VAR sA2* = { *stA2* }
| *VAR sA3* = {}
| *VAR sA4* = { *stA4* }
| *VAR sA5* = {}
| *VAR sA6* = { *stA6* }
| *VAR sA7* = {}
| *VAR sA8* = {}
| *VAR sA9* = {}
| *VAR sA11* = {}
| *VAR sA12* = { *stA1* }
| *VAR sA21* = {}
| *VAR sA22* = { *stA2* }
| *VAR sA23* = {}
| *VAR sA31* = {}
| *VAR sA32* = {}
| *VAR sA41* = {*stA4* }
| *VAR sA42* = {}
| *VAR sA71* = {}
| *VAR sA72* = {}
| *VAR sA81* = {}
| *VAR sA82* = {}
| *VAR sA91* = {}
| *VAR sA92* = {}
| *VAR sA93* = {}
| *VAR sS1* = { *stA1* }
| *VAR sS2* = {}
| *VAR sS3* = {}
| *VAR sS4* = {}
| *VAR sS5* = {}
| *VAR sS6* = {*stA2*, *stA4*}
| *VAR sS7* = {}
| *VAR sS8* = {}
| *VAR sS9* = {*stA6*}
| *VAR sS10* = {}
| *VAR sS11* = {}
| *VAR sS12* = {}
| *VAR sS13* = {}
| *VAR sS14* = {}
| *VAR sS15* = {}
| *VAR sS1opt* = { *stA1* }
| *VAR sS4opt* = { *stA2*, *stA4* }
| *VAR sS7opt* = {}
| *VAR sS11opt* = {}

— function subcomp maps component ID to the set of its subcomponents

fun *subcomp* :: *CSet* ⇒ *CSet set*
where
  subcomp sA1 = { *sA11*, *sA12* }
| *subcomp sA2* = { *sA21*, *sA22*, *sA23* }
| *subcomp sA3* = { *sA31*, *sA32* }
| *subcomp sA4* = { *sA41*, *sA42* }
| *subcomp sA5* = {}
| *subcomp sA6* = {}
| *subcomp sA7* = { *sA71*, *sA72* }
| *subcomp sA8* = { *sA81*, *sA82* }
| *subcomp sA9* = { *sA91*, *sA92*, *sA93* }
| *subcomp sA11* = {}
| *subcomp sA12* = {}
| *subcomp sA21* = {}
| *subcomp sA22* = {}
| *subcomp sA23* = {}
| *subcomp sA31* = {}
| *subcomp sA32* = {}
| *subcomp sA41* = {}
| *subcomp sA42* = {}
| *subcomp sA71* = {}
| *subcomp sA72* = {}
| *subcomp sA81* = {}
| *subcomp sA82* = {}
| *subcomp sA91* = {}
| *subcomp sA92* = {}
| *subcomp sA93* = {}
| *subcomp sS1* = { *sA12* }
| *subcomp sS2* = { *sA11* }
| *subcomp sS3* = { *sA21* }
| *subcomp sS4* = { *sA23* }
| *subcomp sS5* = { *sA32* }
| *subcomp sS6* = { *sA22*, *sA31*, *sA41* }
| *subcomp sS7* = { *sA42*}
| *subcomp sS8* = { *sA5* }
| *subcomp sS9* = { *sA6* }
| *subcomp sS10* = { *sA71* }
| *subcomp sS11* = { *sA72* }
| *subcomp sS12* = { *sA81*, *sA91* }
| *subcomp sS13* = { *sA92* }
| *subcomp sS14* = { *sA82* }
| *subcomp sS15* = { *sA93* }
| *subcomp sS1opt* = { *sA11*, *sA12* }
| *subcomp sS4opt* = { *sA22*, *sA23*, *sA31*, *sA32*, *sA41* }
| *subcomp sS7opt* = { *sA42*, *sA5* }
| *subcomp sS11opt* = { *sA72*, *sA82*, *sA93* }

— function AbstrLevel maps abstraction level ID to the corresponding set of components

axiomatization
  AbstrLevel :: *AbstrLevelsID* ⇒ *CSet set*
where
AbstrLevel0:
AbstrLevel level0 = {*sA1*, *sA2*, *sA3*, *sA4*, *sA5*, *sA6*, *sA7*, *sA8*, *sA9*}
and
AbstrLevel1:
AbstrLevel level1 = {*sA11*, *sA12*, *sA21*, *sA22*, *sA23*, *sA31*, *sA32*,
 sA41, *sA42*, *sA5*, *sA6*, *sA71*, *sA72*, *sA81*, *sA82*, *sA91*, *sA92*, *sA93*}
and
AbstrLevel2:
AbstrLevel level2 = {*sS1*, *sS2*, *sS3*, *sS4*, *sS5*, *sS6*, *sS7*, *sS8*,
                sS9, *sS10*, *sS11*, *sS12*, *sS13*, *sS14*, *sS15*}
and
AbstrLevel3:
AbstrLevel level3 = {*sS1opt*, *sS3*, *sS4opt*, *sS7opt*, *sS9*, *sS10*, *sS11opt*, *sS12*, *sS13*
}

— function VARfrom maps variable ID to the set of input channels it depends from

fun *VARfrom* :: *varID* ⇒ *chanID set*
where
   VARfrom stA1 = {*data1*}
| *VARfrom stA2* = {*data3*}
| *VARfrom stA4* = {*data6*, *data7*}
| *VARfrom stA6* = {*data14*}

— function VARto maps variable ID to the set of output channels depending from this variable
fun *VARto* :: *varID* ⇒ *chanID set*
where
   VARto stA1 = {*data10*}
| *VARto stA2* = {*data4*, *data12*}
| *VARto stA4* = {*data3*}
| *VARto stA6* = {*data15*, *data16*}

— function OUTfromCh maps channel ID to the set of input channels
— from which it depends derectly;
— an empty set means that the channel is either input of the system or
— its values are computed from local variables or are generated
— within some component independently
fun *OUTfromCh* :: *chanID* ⇒ *chanID set*
where

$OUTfromCh\ data1 = \{\}$
$|\ OUTfromCh\ data2 = \{data1\}$
$|\ OUTfromCh\ data3 = \{\}$
$|\ OUTfromCh\ data4 = \{data2\}$
$|\ OUTfromCh\ data5 = \{data2\}$
$|\ OUTfromCh\ data6 = \{data4\}$
$|\ OUTfromCh\ data7 = \{data5\}$
$|\ OUTfromCh\ data8 = \{data13\}$
$|\ OUTfromCh\ data9 = \{data8\}$
$|\ OUTfromCh\ data10 = \{\}$
$|\ OUTfromCh\ data11 = \{data2\}$
$|\ OUTfromCh\ data12 = \{\}$
$|\ OUTfromCh\ data13 = \{\}$
$|\ OUTfromCh\ data14 = \{\}$
$|\ OUTfromCh\ data15 = \{\}$
$|\ OUTfromCh\ data16 = \{\}$
$|\ OUTfromCh\ data17 = \{data15\}$
$|\ OUTfromCh\ data18 = \{data16\}$
$|\ OUTfromCh\ data19 = \{\}$
$|\ OUTfromCh\ data20 = \{data17,\ data22\}$
$|\ OUTfromCh\ data21 = \{data18,\ data19\}$
$|\ OUTfromCh\ data22 = \{data20\}$
$|\ OUTfromCh\ data23 = \{data21\}$
$|\ OUTfromCh\ data24 = \{data20\}$

— function OUTfromV maps channel ID to the set of local variables it depends from

fun $OUTfromV :: chanID \Rightarrow varID\ set$
where
$OUTfromV\ data1 = \{\}$
$|\ OUTfromV\ data2 = \{\}$
$|\ OUTfromV\ data3 = \{stA4\}$
$|\ OUTfromV\ data4 = \{stA2\}$
$|\ OUTfromV\ data5 = \{\}$
$|\ OUTfromV\ data6 = \{\}$
$|\ OUTfromV\ data7 = \{\}$
$|\ OUTfromV\ data8 = \{\}$
$|\ OUTfromV\ data9 = \{\}$
$|\ OUTfromV\ data10 = \{stA1\}$
$|\ OUTfromV\ data11 = \{\}$
$|\ OUTfromV\ data12 = \{stA2\}$
$|\ OUTfromV\ data13 = \{\}$
$|\ OUTfromV\ data14 = \{\}$
$|\ OUTfromV\ data15 = \{stA6\}$
$|\ OUTfromV\ data16 = \{stA6\}$
$|\ OUTfromV\ data17 = \{\}$
$|\ OUTfromV\ data18 = \{\}$
$|\ OUTfromV\ data19 = \{\}$
$|\ OUTfromV\ data20 = \{\}$

$| \ OUTfromV\ data21 = \{\}$
$| \ OUTfromV\ data22 = \{\}$
$| \ OUTfromV\ data23 = \{\}$
$| \ OUTfromV\ data24 = \{\}$

— Set of channels channels which have UplSize measure greather that the predifined value $HighLoad$
definition
$UplSizeHighLoad :: chanID\ set$
where
$UplSizeHighLoad \equiv \{data1, data4, data5, data6, data7, data8, data18, data21\}$

— Set of components from the abstraction level 1 for which the Perf measure is greather that the predifined value $HighPerf$
definition
$HighPerfSet :: CSet\ set$
where
$HighPerfSet \equiv \{sA22, sA23, sA41, sA42, sA72, sA93\}$

end

3 Inter-/Intracomponent dependencies

theory *DataDependencies*
imports *DataDependenciesConcreteValues*
begin

— component and its subcomponents should be defined on different abstraction levels
definition
$correctCompositionDiffLevels :: CSet \Rightarrow bool$
where
$correctCompositionDiffLevels\ S \equiv$
$\forall\ C \in\ subcomp\ S.\ \forall\ i.\ S \in AbstrLevel\ i \longrightarrow C \notin AbstrLevel\ i$

— General system's property: for all abstraction levels and all components should hold
— component and its subcomponents should be defined on different abstraction levels
definition
$correctCompositionDiffLevelsSYSTEM :: bool$
where
$correctCompositionDiffLevelsSYSTEM \equiv$
$(\forall\ S{::}CSet.\ (correctCompositionDiffLevels\ S))$

— if a local variable belongs to one of the subcomponents, it also belongs to the composed component
definition

$correctCompositionVAR :: \ CSet \Rightarrow bool$
where
$correctCompositionVAR\ S \equiv$
$\forall\ C \in\ subcomp\ S.\ \forall\ v \in VAR\ C.\ \ v \in VAR\ S$

— General system's property: for all abstraction levels and all components should hold
— if a local variable belongs to one of the subcomponents, it also belongs to the composed component
definition
$correctCompositionVARSYSTEM :: \ bool$
where
$correctCompositionVARSYSTEM \equiv$
$(\forall\ S{::}CSet.\ (correctCompositionVAR\ S))$

— after correct decomposition of a component each of its local variable can belong only to one of its subcomponents
definition
$correctDeCompositionVAR :: \ CSet \Rightarrow bool$
where
$correctDeCompositionVAR\ S \equiv$
$\forall\ v \in VAR\ S.\ \forall\ C1 \in\ subcomp\ S.\ \forall\ C2 \in\ subcomp\ S.\ v \in VAR\ C1 \wedge v \in VAR\ C2 \longrightarrow C1 = C2$

— General system's property: for all abstraction levels and all components should hold
— after correct decomposition of a component each of its local variable can belong only to one of its subcomponents
definition
$correctDeCompositionVARSYSTEM :: \ bool$
where
$correctDeCompositionVARSYSTEM \equiv$
$(\forall\ S{::}CSet.\ (correctDeCompositionVAR\ S))$

— if x is an output channel of a component C on some anstraction level, it cannot be an output of another component on the same level
definition
$correctCompositionOUT :: \ chanID \Rightarrow bool$
where
$correctCompositionOUT\ x \equiv$
$\forall\ C\ i.\ x \in OUT\ C \wedge C \in AbstrLevel\ i \longrightarrow\ (\forall\ S \in AbstrLevel\ i.\ x \notin OUT\ S)$

— General system's property: for all abstraction levels and all channels should hold

definition
$correctCompositionOUTSYSTEM :: \ bool$
where
$correctCompositionOUTSYSTEM \equiv (\forall\ x.\ correctCompositionOUT\ x)$

— if X is a subcomponent of a component C on some anstraction level, it cannot be a subcomponent of another component on the same level
definition
correctCompositionSubcomp :: *CSet* ⇒ *bool*
where
correctCompositionSubcomp X ≡
∀ *C i*. *X* ∈ *subcomp C* ∧ *C* ∈ *AbstrLevel i* ⟶ (∀ *S* ∈ *AbstrLevel i*. (*S* ≠ *C* ⟶ *X* ∉ *subcomp S*))

— General system's property: for all abstraction levels and all components should hold
definition
correctCompositionSubcompSYSTEM :: *bool*
where
correctCompositionSubcompSYSTEM ≡ (∀ *X*. *correctCompositionSubcomp X*)

— If a component belongs is defined in the set CSet, it should belong to at least one abstraction level
definition
allComponentsUsed :: *bool*
where
allComponentsUsed ≡ ∀ *C*. ∃ *i*. *C* ∈ *AbstrLevel i*

— if a component does not have any local variables, none of its subcomponents has any local variables
lemma *correctDeCompositionVARempty*:
assumes *correctCompositionVAR S*
and *VAR S* = {}
shows ∀ *C* ∈ *subcomp S*. *VAR C* = {}
using *assms* **by** (*metis all-not-in-conv correctCompositionVAR-def*)

— function OUTfrom maps channel ID to the set of input channels it depends from,

— directly (OUTfromCh) or via local variables (VARfrom)
— an empty set means that the channel is either input of the system or
— its values are generated within some component independently
definition *OUTfrom* :: *chanID* ⇒ *chanID set*
where
OUTfrom x ≡ (*OUTfromCh x*) ∪ {*y*. ∃ *v*. *v* ∈ (*OUTfromV x*) ∧ *y* ∈ (*VARfrom v*)}

— if x depends from some input channel(s) directly, then exists
— a component which has them as input channels and x as an output channel
definition
OUTfromChCorrect :: *chanID* ⇒ *bool*
where
OUTfromChCorrect x ≡
(*OUTfromCh x* ≠ {} ⟶

$$(\exists\ Z\ .\ (x \in (OUT\ Z) \wedge (\forall\ y \in (OUTfromCh\ x).\ y \in IN\ Z)\ )))$$

— General system's property: for channels in the system should hold:
— if x depends from some input channel(s) directly, then exists
— a component which has them as input channels and x as an output channel
definition
$OUTfromChCorrectSYSTEM :: bool$
where
$OUTfromChCorrectSYSTEM \equiv (\forall\ x{::}chanID.\ (OUTfromChCorrect\ x))$

— if x depends from some local variables, then exists a component
— to which these variables belong and which has x as an output channel
definition
$OUTfromVCorrect1 :: chanID \Rightarrow bool$
where
$OUTfromVCorrect1\ x \equiv$
$(OUTfromV\ x \neq \{\} \longrightarrow$
$(\exists\ Z\ .\ (x \in (OUT\ Z) \wedge (\forall\ v \in (OUTfromV\ x).\ v \in VAR\ Z)\ )))$

— General system's property: for channels in the system should hold the above property:
definition
$OUTfromVCorrect1SYSTEM :: bool$
where
$OUTfromVCorrect1SYSTEM \equiv (\forall\ x{::}chanID.\ (OUTfromVCorrect1\ x))$

— if x does not depend from any local variables, then it does not belong to any set VARfrom
definition
$OUTfromVCorrect2 :: chanID \Rightarrow bool$
where
$OUTfromVCorrect2\ x \equiv$
$(OUTfromV\ x = \{\} \longrightarrow (\forall\ v{::}varID.\ x \notin (VARto\ v))\ )$

— General system's property: for channels in the system should hold the above property:
definition
$OUTfromVCorrect2SYSTEM :: bool$
where
$OUTfromVCorrect2SYSTEM \equiv\ (\forall\ x{::}chanID.\ (OUTfromVCorrect2\ x))$

— General system's property:
— definitions OUTfromV and VARto should give equivalent mappings
definition
$OUTfromV\text{-}VARto :: bool$
where
$OUTfromV\text{-}VARto \equiv$
$(\forall\ x{::}chanID.\ \forall\ v{::}varID.\ (v \in OUTfromV\ x \longleftrightarrow x \in (VARto\ v))\ )$

— General system's property for abstraction levels 0 and 1
— if a variable v belongs to a component, then all the channels v
— depends from should be input channels of this component
definition
VARfromCorrectSYSTEM :: *bool*
where
VARfromCorrectSYSTEM ≡
(∀ *v*::*varID*. ∀ *Z*∈ ((*AbstrLevel level0*) ∪ (*AbstrLevel level1*)).
((*v* ∈ *VAR Z*) ⟶ (∀ *x* ∈ *VARfrom v*. *x* ∈ *IN Z*)))

— General system's property for abstraction levels 0 and 1
— if a variable v belongs to a component, then all the channels v
— provides value to should be input channels of this component
definition
VARtoCorrectSYSTEM :: *bool*
where
VARtoCorrectSYSTEM ≡
(∀ *v*::*varID*. ∀ *Z* ∈ ((*AbstrLevel level0*) ∪ (*AbstrLevel level1*)).
((*v* ∈ *VAR Z*) ⟶ (∀ *x* ∈ *VARto v*. *x* ∈ *OUT Z*)))

— to detect local variables, unused for computation of any output
definition
VARusefulSYSTEM :: *bool*
where
VARusefulSYSTEM ≡ (∀ *v*::*varID*. (*VARto v* ≠ {}))

lemma
OUTfromV-VARto-lemma:
assumes *OUTfromV x* ≠ {} **and** *OUTfromV-VARto*
shows ∃ *v*::*varID*. *x* ∈ (*VARto v*)
using *assms* **by** (*simp add*: *OUTfromV-VARto-def*, *auto*)

3.1 Direct and indirect data dependencies between components

— The component C should be defined on the same abstraction
— level we are seaching for its direct or indirect sources,
— otherwise we get an empty set as result
definition
DSources :: *AbstrLevelsID* ⇒ *CSet* ⇒ *CSet set*
where
DSources i C ≡ {*Z*. ∃ *x*. *x* ∈ (*IN C*) ∧ *x* ∈ (*OUT Z*) ∧ *Z* ∈ (*AbstrLevel i*) ∧ *C* ∈ (*AbstrLevel i*)}

lemma *DSourcesLevelX*:
(*DSources i X*) ⊆ (*AbstrLevel i*)
by (*simp add*: *DSources-def*, *auto*)

— The component C should be defined on the same abstraction level we are
— seaching for its direct or indirect acceptors (coponents, for which C is a source),

— otherwise we get an empty set as result
definition
$DAcc :: AbstrLevelsID \Rightarrow CSet \Rightarrow CSet\ set$
where
$DAcc\ i\ C \equiv \{Z.\ \exists\ x.\ x \in (OUT\ C) \wedge x \in (IN\ Z) \wedge Z \in (AbstrLevel\ i) \wedge C \in (AbstrLevel\ i)\}$

axiomatization
$Sources :: AbstrLevelsID \Rightarrow CSet \Rightarrow CSet\ set$
where
SourcesDef:
$(Sources\ i\ C) = (DSources\ i\ C) \cup (\bigcup\ S \in (DSources\ i\ C).\ (Sources\ i\ S))$
and
SourceExistsDSource:
$S \in (Sources\ i\ C) \longrightarrow (\exists\ Z.\ S \in (DSources\ i\ Z))$
and
NDSourceExistsDSource:
$S \in (Sources\ i\ C) \wedge S \notin (DSources\ i\ C) \longrightarrow$
$(\exists\ Z.\ S \in (DSources\ i\ Z) \wedge Z \in (Sources\ i\ C))$
and
SourcesTrans:
$(C \in Sources\ i\ S \wedge S \in Sources\ i\ Z) \longrightarrow C \in Sources\ i\ Z$
and
SourcesLevelX:
$(Sources\ i\ X)\ \subseteq (AbstrLevel\ i)$
and
SourcesLoop:
$(Sources\ i\ C) = (XS \cup (Sources\ i\ S)) \wedge (Sources\ i\ S) = (ZS \cup (Sources\ i\ C))$
$\longrightarrow (Sources\ i\ C) = XS\ \cup ZS \cup \{\ C, S\}$
— if we have a loop in the dependencies we need to cut it for counting the sources

axiomatization
$Acc :: AbstrLevelsID \Rightarrow CSet \Rightarrow CSet\ set$
where
AccDef:
$(Acc\ i\ C) = (DAcc\ i\ C) \cup (\bigcup\ S \in (DAcc\ i\ C).\ (Acc\ i\ S))$
and
Acc-Sources:
$(X \in Acc\ i\ C) = (C \in Sources\ i\ X)$
and
AccSigleLoop:
$DAcc\ i\ C = \{S\} \wedge DAcc\ i\ S = \{C\} \longrightarrow Acc\ i\ C = \{C, S\}$
and
AccLoop:
$(Acc\ i\ C) = (XS \cup (Acc\ i\ S)) \wedge (Acc\ i\ S) = (ZS \cup (Acc\ i\ C))$

$\longrightarrow (Acc\ i\ C) = XS\ \cup ZS \cup \{\ C,\ S\}$
— if we have a loop in the dependencies we need to cut it for counting the accessors

lemma *Acc-SourcesNOT*: $(X \notin Acc\ i\ C) = (C \notin Sources\ i\ X)$
by (*metis Acc-Sources*)

— component S is not a source for any component on the abstraction level i
definition
isNotDSource :: *AbstrLevelsID* ⇒ *CSet* ⇒ *bool*
where
$isNotDSource\ i\ S \equiv (\forall\ x \in (OUT\ S).\ (\forall\ Z \in (AbstrLevel\ i).\ (x \notin (IN\ Z))))$

— component S is not a source for a component Z on the abstraction level i
definition
isNotDSourceX :: *AbstrLevelsID* ⇒ *CSet* ⇒ *CSet* ⇒ *bool*
where
$isNotDSourceX\ i\ S\ C \equiv (\forall\ x \in (OUT\ S).\ (C \notin (AbstrLevel\ i) \vee (x \notin (IN\ C))))$

lemma *isNotSource-isNotSourceX*:
$isNotDSource\ i\ S = (\forall\ C.\ isNotDSourceX\ i\ S\ C)$
by (*auto*, (*simp add*: *isNotDSource-def isNotDSourceX-def*)+)

lemma *DAcc-DSources*:
$(X \in DAcc\ i\ C) = (C \in DSources\ i\ X)$
by (*auto*, (*simp add*: *DAcc-def DSources-def*, *auto*)+)

lemma *DAcc-DSourcesNOT*:
$(X \notin DAcc\ i\ C) = (C \notin DSources\ i\ X)$
by (*auto*, (*simp add*: *DAcc-def DSources-def*, *auto*)+)

lemma *DSource-level*:
assumes $S \in (DSources\ i\ C)$
shows $C\ \in (AbstrLevel\ i)$
using *assms* **by** (*simp add*: *DSources-def*, *auto*)

lemma *SourceExistsDSource-level*:
assumes $S \in (Sources\ i\ C)$
shows $\exists\ Z\ \in (AbstrLevel\ i).\ (S \in (DSources\ i\ Z))$
using *assms* **by** (*metis DSource-level SourceExistsDSource*)

lemma *Sources-DSources*:
$(DSources\ i\ C) \subseteq (Sources\ i\ C)$
proof −
have $(Sources\ i\ C) = (DSources\ i\ C) \cup (\bigcup\ S \in (DSources\ i\ C).\ (Sources\ i\ S))$
by (*rule SourcesDef*)
thus *?thesis* **by** *auto*
qed

lemma *NoDSourceNoSource*:
assumes $S \notin (Sources\ i\ C)$
shows $S \notin (DSources\ i\ C)$
using *assms* **by** (*metis* (*full-types*) *Sources-DSources set-rev-mp*)

lemma *DSourcesEmptySources*:
assumes $DSources\ i\ C = \{\}$
shows $Sources\ i\ C = \{\}$
proof −
have $(Sources\ i\ C) = (DSources\ i\ C) \cup (\bigcup\ S \in (DSources\ i\ C).\ (Sources\ i\ S))$

by (*rule SourcesDef*)
with *assms* **show** *?thesis* **by** *auto*
qed

lemma *DSource-Sources*:
assumes $S \in (DSources\ i\ C)$
shows $(Sources\ i\ S) \subseteq (Sources\ i\ C)$
proof −
have $(Sources\ i\ C) = (DSources\ i\ C) \cup (\bigcup\ S \in (DSources\ i\ C).\ (Sources\ i\ S))$
by (*rule SourcesDef*)
with *assms* **show** *?thesis* **by** *auto*
qed

lemma *SourcesOnlyDSources*:
assumes $\forall\ X.\ (X \in (DSources\ i\ C) \longrightarrow (DSources\ i\ X) = \{\})$
shows $Sources\ i\ C = DSources\ i\ C$
proof −
have *sDef*: $(Sources\ i\ C) = (DSources\ i\ C) \cup (\bigcup\ S \in (DSources\ i\ C).\ (Sources\ i\ S))$
by (*rule SourcesDef*)
from *assms* **have** $\forall\ X.\ (X \in (DSources\ i\ C) \longrightarrow (Sources\ i\ X) = \{\})$
by (*simp add*: *DSourcesEmptySources*)
hence $(\bigcup\ S \in (DSources\ i\ C).\ (Sources\ i\ S)) = \{\}$ **by** *auto*
with *sDef* **show** *?thesis* **by** *simp*
qed

lemma *SourcesEmptyDSources*:
assumes $Sources\ i\ C = \{\}$
shows $DSources\ i\ C = \{\}$
using *assms* **by** (*metis Sources-DSources bot.extremum-uniqueI*)

lemma *NotDSource*:
assumes $\forall\ x \in (OUT\ S).\ (\forall\ Z \in (AbstrLevel\ i).\ (x \notin (IN\ Z)))$
shows $\forall\ C \in (AbstrLevel\ i)\ .\ S \notin (DSources\ i\ C)$
using *assms* **by** (*simp add*: *AbstrLevel0 DSources-def*)

lemma *allNotDSource-NotSource*:
assumes $\forall\ C\ .\ S \notin (DSources\ i\ C)$

shows $\forall\ Z.\ S \notin (Sources\ i\ Z)$
using *assms* **by** (*metis SourceExistsDSource*)

lemma *NotDSource-NotSource*:
assumes $\forall\ C \in (AbstrLevel\ i).\ S \notin (DSources\ i\ C)$
shows $\forall\ Z \in (AbstrLevel\ i).\ S \notin (Sources\ i\ Z)$
using *assms* **by** (*metis SourceExistsDSource-level*)

lemma *isNotSource-Sources*:
assumes *isNotDSource i S*
shows $\forall\ C\ \in (AbstrLevel\ i).\ S \notin (Sources\ i\ C)$
using *assms*
by (*simp add*: *isNotDSource-def*, *metis* (*full-types*) *NotDSource NotDSource-NotSource*)

lemma *SourcesAbstrLevel*:
assumes $x \in Sources\ i\ S$
shows $x \in AbstrLevel\ i$
using *assms*
by (*metis SourcesLevelX in-mono*)

lemma *DSourceIsSource*:
assumes $C \in DSources\ i\ S$
shows $C \in Sources\ i\ S$
proof −
have $(Sources\ i\ S) = (DSources\ i\ S) \cup (\bigcup\ Z \in (DSources\ i\ S).\ (Sources\ i\ Z))$
by (*rule SourcesDef*)
with *assms* **show** *?thesis* **by** *simp*
qed

lemma *DSourceOfDSource*:
assumes $Z \in DSources\ i\ S$
and $S \in DSources\ i\ C$
shows $Z \in Sources\ i\ C$
using *assms*
proof −
from *assms* **have** *src*:$Sources\ i\ S \subseteq Sources\ i\ C$ **by** (*simp add*: *DSource-Sources*)
from *assms* **have** $Z \in Sources\ i\ S$ **by** (*simp add*: *DSourceIsSource*)
with *src* **show** *?thesis* **by** *auto*
qed

lemma *SourceOfDSource*:
assumes $Z \in Sources\ i\ S$
and $S \in DSources\ i\ C$
shows $Z \in Sources\ i\ C$
using *assms*
proof −
from *assms* **have** $Sources\ i\ S \subseteq Sources\ i\ C$ **by** (*simp add*: *DSource-Sources*)
thus *?thesis* **by** (*metis* (*full-types*) *assms*(*1*) *set-rev-mp*)
qed

lemma *DSourceOfSource*:
assumes *cDS*:*C* ∈ *DSources i S*
and *sS*:*S* ∈ *Sources i Z*
shows *C* ∈ *Sources i Z*
proof −
from *cDS* **have** *C* ∈ *Sources i S* **by** (*simp add*: *DSourceIsSource*)
from *this* **and** *sS* **show** *?thesis* **by** (*metis* (*full-types*) *SourcesTrans*)
qed

lemma *Sources-singleDSource*:
assumes *DSources i S* = {*C*}
shows *Sources i S* = {*C*} ∪ *Sources i C*
proof −
have *sDef*: (*Sources i S*) = (*DSources i S*) ∪ (⋃ *Z* ∈ (*DSources i S*). (*Sources i Z*))
by (*rule SourcesDef*)
from *assms* **have** (⋃ *Z* ∈ (*DSources i S*). (*Sources i Z*)) = *Sources i C*
by *auto*
with *sDef assms* **show** *?thesis* **by** *simp*
qed

lemma *Sources-2DSources*:
assumes *DSources i S* = {*C1*, *C2*}
shows *Sources i S* = {*C1*, *C2*} ∪ *Sources i C1* ∪ *Sources i C2*
proof −
have *sDef*: (*Sources i S*) = (*DSources i S*) ∪ (⋃ *Z* ∈ (*DSources i S*). (*Sources i Z*))
by (*rule SourcesDef*)
from *assms* **have** (⋃ *Z* ∈ (*DSources i S*). (*Sources i Z*)) = *Sources i C1* ∪ *Sources i C2*
by *auto*
with *sDef* **and** *assms* **show** *?thesis* **by** *simp*
qed

lemma *Sources-3DSources*:
assumes *DSources i S* = {*C1*, *C2*, *C3*}
shows *Sources i S* = {*C1*, *C2*, *C3*} ∪ *Sources i C1* ∪ *Sources i C2* ∪ *Sources i C3*
proof −
have *sDef*: (*Sources i S*) = (*DSources i S*) ∪ (⋃ *Z* ∈ (*DSources i S*). (*Sources i Z*))
by (*rule SourcesDef*)
from *assms* **have** (⋃ *Z* ∈ (*DSources i S*). (*Sources i Z*)) = *Sources i C1* ∪ *Sources i C2* ∪ *Sources i C3*
by *auto*
with *sDef* **and** *assms* **show** *?thesis* **by** *simp*
qed

lemma *singleDSourceEmpty4isNotDSource*:
assumes $DAcc\ i\ C = \{S\}$
and $Z \neq S$
shows $C \notin (DSources\ i\ Z)$
proof −
from *assms* **have** $(Z \notin DAcc\ i\ C)$ **by** *simp*
thus *?thesis* **by** (*simp add*: *DAcc-DSourcesNOT*)
qed

lemma *singleDSourceEmpty4isNotDSourceLevel*:
assumes $DAcc\ i\ C = \{S\}$
shows $\forall\ Z \in (AbstrLevel\ i).\ Z \neq S \longrightarrow C \notin (DSources\ i\ Z)$
using *assms* **by** (*metis singleDSourceEmpty4isNotDSource*)

lemma *isNotDSource-EmptyDAcc*:
assumes *isNotDSource i S*
shows $DAcc\ i\ S = \{\}$
using *assms* **by** (*simp add*: *DAcc-def isNotDSource-def*, *auto*)

lemma *isNotDSource-EmptyAcc*:
assumes *isNotDSource i S*
shows $Acc\ i\ S = \{\}$
proof −
have $(Acc\ i\ S) = (DAcc\ i\ S) \cup (\bigcup\ X \in (DAcc\ i\ S).\ (Acc\ i\ X))$
by (*rule AccDef*)
thus *?thesis* **by** (*metis SUP-empty Un-absorb assms isNotDSource-EmptyDAcc*)

qed

lemma *singleDSourceEmpty-Acc*:
assumes $DAcc\ i\ C = \{S\}$
and *isNotDSource i S*
shows $Acc\ i\ C = \{S\}$
proof −
have *AccC*:$(Acc\ i\ C) = (DAcc\ i\ C) \cup (\bigcup\ S \in (DAcc\ i\ C).\ (Acc\ i\ S))$
by (*rule AccDef*)
from *assms* **have** $Acc\ i\ S = \{\}$ **by** (*simp add*: *isNotDSource-EmptyAcc*)
with *AccC* **show** *?thesis*
by (*metis SUP-empty UN-insert Un-commute Un-empty-left assms*(*1*))
qed

lemma *singleDSourceEmpty4isNotSource*:
assumes $DAcc\ i\ C = \{S\}$
and *nSourcS*:*isNotDSource i S*
and $Z \neq S$
shows $C \notin (Sources\ i\ Z)$
proof −
from *assms* **have** $Acc\ i\ C = \{S\}$ **by** (*simp add*: *singleDSourceEmpty-Acc*)

with *assms* **have** $Z \notin Acc\ i\ C$ **by** *simp*
thus *?thesis* **by** (*simp add*: *Acc-SourcesNOT*)
qed

lemma *singleDSourceEmpty4isNotSourceLevel*:
assumes $DAcc\ i\ C = \{S\}$
and *nSourcS*:*isNotDSource i S*
shows $\forall\ Z \in (AbstrLevel\ i).\ Z \neq S \longrightarrow C \notin (Sources\ i\ Z)$
using *assms*
by (*metis singleDSourceEmpty4isNotSource*)

lemma *singleDSourceLoop*:
assumes $DAcc\ i\ C = \{S\}$
and $DAcc\ i\ S = \{C\}$
shows $\forall\ Z \in (AbstrLevel\ i).\ (Z \neq S \wedge Z \neq C \longrightarrow C \notin (Sources\ i\ Z))$
using *assms*
by (*metis AccSigleLoop Acc-SourcesNOT empty-iff insert-iff*)

3.2 Components that are elementary wrt. data dependencies

— two output channels of a component C are corelated, if they mutually depend on the same local variable(s)
definition
outPairCorelated :: $CSet \Rightarrow chanID \Rightarrow chanID \Rightarrow bool$
where
$outPairCorelated\ C\ x\ y \equiv$
$(x \in OUT\ C) \wedge \quad (y \in OUT\ C) \wedge$
$(OUTfromV\ x) \cap (OUTfromV\ y) \neq \{\}$

— We call a set of output channels of a conponent correlated to it output channel x,
— if they mutually depend on the same local variable(s)
definition
outSetCorelated :: $chanID \Rightarrow chanID\ set$
where
$outSetCorelated\ x \equiv$
$\{\ y{::}chanID\ .\ \exists\ v{::}varID.\ (v \in (OUTfromV\ x) \wedge (y \in VARto\ v))\ \}$

— Elementary component according to the data dependencies.
— This constraint should hold for all components on the abstraction level 1
definition
elementaryCompDD :: $CSet \Rightarrow bool$
where
$elementaryCompDD\ C \equiv$
$((\exists\ x.\ (OUT\ C) = \{x\}\ ) \vee$

(∀ $x \in (OUT\ C)$. ∀ $y \in (OUT\ C)$. $((outSetCorelated\ x) \cap (outSetCorelated\ y) \neq \{\})$))

— the set (outSetCorelated x) is empty if x does not depend from any variable
lemma *outSetCorelatedEmpty1*:
assumes $OUTfromV\ x = \{\}$
shows $outSetCorelated\ x = \{\}$
using *assms* **by** (*simp add*: *outSetCorelated-def*)

— if x depends from at least one variable and the predicates OUTfromV and VARto are defined correctly,
— the set (outSetCorelated x) contains x itself
lemma *outSetCorelatedNonemptyX*:
assumes $OUTfromV\ x \neq \{\}$ **and** *correct3*:*OUTfromV-VARto*
shows $x \in outSetCorelated\ x$
proof −
from *assms* **have** ∃ *v*::*varID*. $x \in (VARto\ v)$
by (*rule OUTfromV-VARto-lemma*)
from *this* **and** *assms* **show** *?thesis*
by (*simp add*: *outSetCorelated-def OUTfromV-VARto-def*)
qed

— if the set (outSetCorelated x) is empty, this means that x does not depend from any variable
lemma *outSetCorelatedEmpty2*:
assumes $outSetCorelated\ x = \{\}$ **and** *correct3*:*OUTfromV-VARto*
shows $OUTfromV\ x = \{\}$
proof (*rule ccontr*)
assume *OUTfromVNonempty*:$OUTfromV\ x \neq \{\}$
from *this* **and** *correct3* **have** $x \in outSetCorelated\ x$
by (*rule outSetCorelatedNonemptyX*)
from *this* **and** *assms* **show** *False* **by** *simp*
qed

3.3 Set of components needed to check a specific property

— set of components specified on abstreaction level i, which input channels belong to the set chSet
definition
$inSetOfComponents :: AbstrLevelsID \Rightarrow chanID\ set \Rightarrow CSet\ set$
where
$inSetOfComponents\ i\ chSet \equiv$
$\{X.\ (((IN\ X) \cap chSet \neq \{\})\ \wedge X \in (AbstrLevel\ i))\}$

— Set of components from the abstraction level i, which output channels belong to the set chSet
definition
$outSetOfComponents :: AbstrLevelsID \Rightarrow chanID\ set \Rightarrow CSet\ set$

where
outSetOfComponents i chSet ≡
{*Y*. (((*OUT Y*) ∩ *chSet* ≠ {}) ∧ *Y* ∈ (*AbstrLevel i*))}

— Set of components from the abstraction level i,
— which have output channels from the set chSet or are sources for such components

definition
minSetOfComponents :: *AbstrLevelsID* ⇒ *chanID set* ⇒ *CSet set*
where
minSetOfComponents i chSet ≡
(*outSetOfComponents i chSet*) ∪
(⋃ *S* ∈ (*outSetOfComponents i chSet*). (*Sources i S*))

— Please note that a system output cannot beat the same time a local chanel.

— channel x is a system input on an abstraction level i
definition *systemIN* ::*chanID* ⇒ *AbstrLevelsID* ⇒ *bool*
where
systemIN x i ≡ (∃ *C1* ∈ (*AbstrLevel i*). *x* ∈ (*IN C1*)) ∧ (∀ *C2* ∈ (*AbstrLevel i*). *x* ∉ (*OUT C2*))

— channel x is a system input on an abstraction level i
definition *systemOUT* ::*chanID* ⇒ *AbstrLevelsID* ⇒ *bool*
where
systemOUT x i ≡ (∀ *C1* ∈ (*AbstrLevel i*). *x* ∉ (*IN C1*)) ∧ (∃ *C2* ∈ (*AbstrLevel i*). *x* ∈ (*OUT C2*))

— channel x is a system local channel on an abstraction level i
definition *systemLOC* ::*chanID* ⇒ *AbstrLevelsID* ⇒ *bool*
where
systemLOC x i ≡ (∃ *C1* ∈ (*AbstrLevel i*). *x* ∈ (*IN C1*)) ∧ (∃ *C2* ∈ (*AbstrLevel i*). *x* ∈ (*OUT C2*))

lemma *systemIN-noOUT*:
assumes *systemIN x i*
shows ¬ *systemOUT x i*
using *assms* **by** (*simp add*: *systemIN-def systemOUT-def*)

lemma *systemOUT-noIN*:
assumes *systemOUT x i*
shows ¬ *systemIN x i*
using *assms* **by** (*simp add*: *systemIN-def systemOUT-def*)

lemma *systemIN-noLOC*:
assumes *systemIN x i*
shows ¬ *systemLOC x i*
using *assms* **by** (*simp add*: *systemIN-def systemLOC-def*)

lemma *systemLOC-noIN*:
assumes *systemLOC x i*
shows ¬ *systemIN x i*
using *assms* **by** (*simp add*: *systemIN-def systemLOC-def*)

lemma *systemOUT-noLOC*:
assumes *systemOUT x i*
shows ¬ *systemLOC x i*
using *assms* **by** (*simp add*: *systemOUT-def systemLOC-def*)

lemma *systemLOC-noOUT*:
assumes *systemLOC x i*
shows ¬ *systemOUT x i*
using *assms* **by** (*simp add*: *systemLOC-def systemOUT-def*)

definition
noIrrelevantChannels :: *AbstrLevelsID* ⇒ *chanID set* ⇒ *bool*
where
noIrrelevantChannels i chSet ≡
∀ *x* ∈ *chSet*. ((*systemIN x i*) ⟶
(∃ *Z* ∈ (*minSetOfComponents i chSet*). *x* ∈ (*IN Z*)))

definition
allNeededINChannels :: *AbstrLevelsID* ⇒ *chanID set* ⇒ *bool*
where
allNeededINChannels i chSet ≡
(∀ *Z* ∈ (*minSetOfComponents i chSet*). ∃ *x* ∈ (*IN Z*). ((*systemIN x i*) ⟶ (*x* ∈ *chSet*)))

— the set (outSetOfComponents i chSet) should be a subset of all components specified on the abstraction level i
lemma *outSetOfComponentsLimit*:
outSetOfComponents i chSet ⊆ *AbstrLevel i*
by (*metis* (*lifting*) *mem-Collect-eq outSetOfComponents-def subsetI*)

— the set (inSetOfComponents i chSet) should be a subset of all components specified on the abstraction level i
lemma *inSetOfComponentsLimit*:
inSetOfComponents i chSet ⊆ *AbstrLevel i*
by (*metis* (*lifting*) *inSetOfComponents-def mem-Collect-eq subsetI*)

— the set of components, which are sources for the components
— out of (inSetOfComponents i chSet), should be a subset of
— all components specified on the abstraction level i
lemma *SourcesLevelLimit*:
(⋃ *S* ∈ (*outSetOfComponents i chSet*). (*Sources i S*)) ⊆ *AbstrLevel i*
proof −
have *sg1*:*outSetOfComponents i chSet* ⊆ *AbstrLevel i*

by (*simp add*: *outSetOfComponentsLimit*)
have $\forall\ S.\ S \in (outSetOfComponents\ i\ chSet) \longrightarrow Sources\ i\ S \subseteq AbstrLevel\ i$
by (*metis SourcesLevelX*)
from *this* **and** *sg1* **show** *?thesis* **by** *auto*
qed

lemma *minSetOfComponentsLimit*:
$minSetOfComponents\ i\ chSet \subseteq AbstrLevel\ i$
proof −
have *sg1*: $outSetOfComponents\ i\ chSet \subseteq AbstrLevel\ i$
by (*simp add*: *outSetOfComponentsLimit*)
have $(\bigcup\ S \in (outSetOfComponents\ i\ chSet).\ (Sources\ i\ S)) \subseteq AbstrLevel\ i$
by (*simp add*: *SourcesLevelLimit*)
with *sg1* **show** *?thesis* **by** (*simp add*: *minSetOfComponents-def*)
qed

3.4 Additional properties: Remote Computation

— The value of $UplSizeHighLoad\ x$ is True if its $UplSize$ measure is greather that a predifined value
definition $UplSizeHighLoadCh :: chanID \Rightarrow bool$
where
$UplSizeHighLoadCh\ x \equiv (x \in UplSizeHighLoad)$

— if the $Perf$ measure of at least one subcomponent is greather than a predifined value,
— the $Perf$ measure of this component is greather than $HighPerf$ too
axiomatization $HighPerfComp :: CSet \Rightarrow bool$
where
HighPerfComDef:
$HighPerfComp\ C =$
$((C \in HighPerfSet) \vee (\exists\ Z \in subcomp\ C.\ (HighPerfComp\ Z)))$

end

4 Case Study: Verification of Properties

theory *DataDependenciesCaseStudy*
imports *DataDependencies*
begin

4.1 Correct composition of components

— the lemmas AbstrLevels X Y with corresponding proofs can be composend
— and proven automatically, their proofs are identical
lemma *AbstrLevels-A1-A11*:
assumes $sA1 \in AbstrLevel\ i$

shows *sA11* $\notin$ *AbstrLevel i*
using *assms*
by (*induct i*, *simp add*: *AbstrLevel0*, *simp add*: *AbstrLevel1*, *simp add*: *AbstrLevel2*, *simp add*: *AbstrLevel3*)

lemma *AbstrLevels-A1-A12*:
assumes *sA1* $\in$ *AbstrLevel i* **shows** *sA12* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A2-A21*:
assumes *sA2* $\in$ *AbstrLevel i* **shows** *sA21* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A2-A22*:
assumes *sA2* $\in$ *AbstrLevel i* **shows** *sA22* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A2-A23*:
assumes *sA2* $\in$ *AbstrLevel i* **shows** *sA23* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A3-A31*:
assumes *sA3* $\in$ *AbstrLevel i* **shows** *sA31* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A3-A32*:
assumes *sA3* $\in$ *AbstrLevel i* **shows** *sA32* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A4-A41*:
assumes *sA4* $\in$ *AbstrLevel i* **shows** *sA41* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A4-A42*:
assumes *sA4* $\in$ *AbstrLevel i* **shows** *sA42* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A7-A71*:
assumes *sA7* $\in$ *AbstrLevel i* **shows** *sA71* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A7-A72*:
assumes *sA7* $\in$ *AbstrLevel i* **shows** *sA72* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A8-A81*:
assumes *sA8* $\in$ *AbstrLevel i* **shows** *sA81* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A8-A82*:
assumes *sA8* $\in$ *AbstrLevel i* **shows** *sA82* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A9-A91*:
assumes *sA9* $\in$ *AbstrLevel i* **shows** *sA91* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A9-A92*:
assumes *sA9* $\in$ *AbstrLevel i* **shows** *sA92* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-A9-A93*:
assumes *sA9* $\in$ *AbstrLevel i* **shows** *sA93* $\notin$ *AbstrLevel i*

lemma *AbstrLevels-S1-A12*:
assumes *sS1* ∈ *AbstrLevel i* **shows** *sA12* ∉ *AbstrLevel i*

lemma *AbstrLevels-S2-A11*:
assumes *sS2* ∈ *AbstrLevel i* **shows** *sA11* ∉ *AbstrLevel i*

lemma *AbstrLevels-S3-A21*:
assumes *sS3* ∈ *AbstrLevel i* **shows** *sA21* ∉ *AbstrLevel i*

lemma *AbstrLevels-S4-A23*:
assumes *sS4* ∈ *AbstrLevel i* **shows** *sA23* ∉ *AbstrLevel i*

lemma *AbstrLevels-S5-A32*:
assumes *sS5* ∈ *AbstrLevel i* **shows** *sA32* ∉ *AbstrLevel i*

lemma *AbstrLevels-S6-A22*:
assumes *sS6* ∈ *AbstrLevel i* **shows** *sA22* ∉ *AbstrLevel i*

lemma *AbstrLevels-S6-A31*:
assumes *sS6* ∈ *AbstrLevel i* **shows** *sA31* ∉ *AbstrLevel i*

lemma *AbstrLevels-S6-A41*:
assumes *sS6* ∈ *AbstrLevel i* **shows** *sA41* ∉ *AbstrLevel i*

lemma *AbstrLevels-S7-A42*:
assumes *sS7* ∈ *AbstrLevel i* **shows** *sA42* ∉ *AbstrLevel i*

lemma *AbstrLevels-S8-A5*:
assumes *sS8* ∈ *AbstrLevel i* **shows** *sA5* ∉ *AbstrLevel i*

lemma *AbstrLevels-S9-A6*:
assumes *sS9* ∈ *AbstrLevel i* **shows** *sA6* ∉ *AbstrLevel i*

lemma *AbstrLevels-S10-A71*:
assumes *sS10* ∈ *AbstrLevel i* **shows** *sA71* ∉ *AbstrLevel i*

lemma *AbstrLevels-S11-A72*:
assumes *sS11* ∈ *AbstrLevel i* **shows** *sA72* ∉ *AbstrLevel i*

lemma *AbstrLevels-S12-A81*:
assumes *sS12* ∈ *AbstrLevel i* **shows** *sA81* ∉ *AbstrLevel i*

lemma *AbstrLevels-S12-A91*:
assumes *sS12* ∈ *AbstrLevel i* **shows** *sA91* ∉ *AbstrLevel i*

lemma *AbstrLevels-S13-A92*:
assumes *sS13* ∈ *AbstrLevel i* **shows** *sA92* ∉ *AbstrLevel i*

lemma *AbstrLevels-S14-A82*:
assumes *sS14* ∈ *AbstrLevel i* **shows** *sA82* ∉ *AbstrLevel i*

lemma *AbstrLevels-S15-A93*:
assumes *sS15* ∈ *AbstrLevel i* **shows** *sA93* ∉ *AbstrLevel i*

lemma *AbstrLevels-S1opt-A11*:
assumes *sS1opt* ∈ *AbstrLevel i* **shows** *sA11* ∉ *AbstrLevel i*

lemma *AbstrLevels-S1opt-A12*:
assumes *sS1opt* ∈ *AbstrLevel i* **shows** *sA12* ∉ *AbstrLevel i*

lemma *AbstrLevels-S4opt-A23*:
assumes *sS4opt* ∈ *AbstrLevel i* **shows** *sA23* ∉ *AbstrLevel i*

lemma *AbstrLevels-S4opt-A32*:
assumes *sS4opt* ∈ *AbstrLevel i* **shows** *sA32* ∉ *AbstrLevel i*

lemma *AbstrLevels-S4opt-A22*:
assumes *sS4opt* ∈ *AbstrLevel i* **shows** *sA22* ∉ *AbstrLevel i*

lemma *AbstrLevels-S4opt-A31*:
assumes *sS4opt* ∈ *AbstrLevel i* **shows** *sA31* ∉ *AbstrLevel i*

lemma *AbstrLevels-S4opt-A41*:
assumes *sS4opt* ∈ *AbstrLevel i* **shows** *sA41* ∉ *AbstrLevel i*

lemma *AbstrLevels-S7opt-A42*:
assumes *sS7opt* ∈ *AbstrLevel i* **shows** *sA42* ∉ *AbstrLevel i*

lemma *AbstrLevels-S7opt-A5*:
assumes *sS7opt* ∈ *AbstrLevel i* **shows** *sA5* ∉ *AbstrLevel i*

lemma *AbstrLevels-S11opt-A72*:
assumes *sS11opt* ∈ *AbstrLevel i* **shows** *sA72* ∉ *AbstrLevel i*

lemma *AbstrLevels-S11opt-A82*:
assumes *sS11opt* ∈ *AbstrLevel i* **shows** *sA82* ∉ *AbstrLevel i*

lemma *AbstrLevels-S11opt-A93*:
assumes *sS11opt* ∈ *AbstrLevel i* **shows** *sA93* ∉ *AbstrLevel i*

lemma *correctCompositionDiffLevelsA1*: *correctCompositionDiffLevels sA1*

lemma *correctCompositionDiffLevelsA2*: *correctCompositionDiffLevels sA2*

lemma *correctCompositionDiffLevelsA3*: *correctCompositionDiffLevels sA3*

lemma *correctCompositionDiffLevelsA4*: *correctCompositionDiffLevels sA4*

— lemmas correctCompositionDiffLevelsX and corresponding proofs
— are identical for all elementary components, they can be constructed automatically
lemma *correctCompositionDiffLevelsA5*: *correctCompositionDiffLevels sA5*
lemma *correctCompositionDiffLevelsA6*: *correctCompositionDiffLevels sA6*
lemma *correctCompositionDiffLevelsA7*: *correctCompositionDiffLevels sA7*
lemma *correctCompositionDiffLevelsA8*: *correctCompositionDiffLevels sA8*
lemma *correctCompositionDiffLevelsA9*: *correctCompositionDiffLevels sA9*
lemma *correctCompositionDiffLevelsA11*: *correctCompositionDiffLevels sA11*
lemma *correctCompositionDiffLevelsA12*: *correctCompositionDiffLevels sA12*
lemma *correctCompositionDiffLevelsA21*: *correctCompositionDiffLevels sA21*
lemma *correctCompositionDiffLevelsA22*: *correctCompositionDiffLevels sA22*
lemma *correctCompositionDiffLevelsA23*: *correctCompositionDiffLevels sA23*
lemma *correctCompositionDiffLevelsA31*: *correctCompositionDiffLevels sA31*
lemma *correctCompositionDiffLevelsA32*: *correctCompositionDiffLevels sA32*
lemma *correctCompositionDiffLevelsA41*: *correctCompositionDiffLevels sA41*
lemma *correctCompositionDiffLevelsA42*: *correctCompositionDiffLevels sA42*
lemma *correctCompositionDiffLevelsA71*: *correctCompositionDiffLevels sA71*
lemma *correctCompositionDiffLevelsA72*: *correctCompositionDiffLevels sA72*
lemma *correctCompositionDiffLevelsA81*: *correctCompositionDiffLevels sA81*
lemma *correctCompositionDiffLevelsA82*: *correctCompositionDiffLevels sA82*
lemma *correctCompositionDiffLevelsA91*: *correctCompositionDiffLevels sA91*
lemma *correctCompositionDiffLevelsA92*: *correctCompositionDiffLevels sA92*
lemma *correctCompositionDiffLevelsA93*: *correctCompositionDiffLevels sA93*
lemma *correctCompositionDiffLevelsS1*: *correctCompositionDiffLevels sS1*
lemma *correctCompositionDiffLevelsS2*: *correctCompositionDiffLevels sS2*
lemma *correctCompositionDiffLevelsS3*: *correctCompositionDiffLevels sS3*
lemma *correctCompositionDiffLevelsS4*: *correctCompositionDiffLevels sS4*
lemma *correctCompositionDiffLevelsS5*: *correctCompositionDiffLevels sS5*
lemma *correctCompositionDiffLevelsS6*: *correctCompositionDiffLevels sS6*
lemma *correctCompositionDiffLevelsS7*: *correctCompositionDiffLevels sS7*
lemma *correctCompositionDiffLevelsS8*: *correctCompositionDiffLevels sS8*
lemma *correctCompositionDiffLevelsS9*: *correctCompositionDiffLevels sS9*
lemma *correctCompositionDiffLevelsS10*: *correctCompositionDiffLevels sS10*
lemma *correctCompositionDiffLevelsS11*: *correctCompositionDiffLevels sS11*
lemma *correctCompositionDiffLevelsS12*: *correctCompositionDiffLevels sS12*
lemma *correctCompositionDiffLevelsS13*: *correctCompositionDiffLevels sS13*
lemma *correctCompositionDiffLevelsS14*: *correctCompositionDiffLevels sS14*
lemma *correctCompositionDiffLevelsS15*: *correctCompositionDiffLevels sS15*
lemma *correctCompositionDiffLevelsS1opt*: *correctCompositionDiffLevels sS1opt*
lemma *correctCompositionDiffLevelsS4opt*: *correctCompositionDiffLevels sS4opt*
lemma *correctCompositionDiffLevelsS7opt*: *correctCompositionDiffLevels sS7opt*
lemma *correctCompositionDiffLevelsS11opt*: *correctCompositionDiffLevels sS11opt*
lemma *correctCompositionDiffLevelsSYSTEM-holds*:
correctCompositionDiffLevelsSYSTEM
lemma *correctCompositionVARSYSTEM-holds*:
correctCompositionVARSYSTEM
by (*simp add*: *correctCompositionVARSYSTEM-def*, *clarify*, *case-tac S*, (*simp*

add: *correctCompositionVAR-def*)+)

lemma *correctDeCompositionVARSYSTEM-holds*:
correctDeCompositionVARSYSTEM
by (*simp add*: *correctDeCompositionVARSYSTEM-def*, *clarify*, *case-tac S*, (*simp add*: *correctDeCompositionVAR-def*)+)

4.2 Correct specification of the relations between channels

lemma *OUTfromChCorrect-data1*: *OUTfromChCorrect data1*
by (*simp add*: *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data2*: *OUTfromChCorrect data2*
by (*metis IN.simps*(*27*) *OUT.simps*(*27*) *OUTfromCh.simps*(*2*) *OUTfromChCorrect-def insertI1*)

lemma *OUTfromChCorrect-data3*: *OUTfromChCorrect data3*
by (*metis OUTfromCh.simps*(*3*) *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data4*: *OUTfromChCorrect data4*
by (*metis IN.simps*(*2*) *OUT.simps*(*2*) *OUTfromCh.simps*(*4*) *OUTfromChCorrect-def insertI1 singleton-iff*)

lemma *OUTfromChCorrect-data5*: *OUTfromChCorrect data5*
by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*14*) *OUT.simps*(*14*) *insertI1*)

lemma *OUTfromChCorrect-data6*: *OUTfromChCorrect data6*
by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*15*) *OUT.simps*(*15*) *insertI1*)

lemma *OUTfromChCorrect-data7*: *OUTfromChCorrect data7*
by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*16*) *OUT.simps*(*16*) *insertI1*)

lemma *OUTfromChCorrect-data8*: *OUTfromChCorrect data8*
by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*18*) *OUT.simps*(*18*) *insertI1*)

lemma *OUTfromChCorrect-data9*: *OUTfromChCorrect data9*
by (*simp add*: *OUTfromChCorrect-def* , *metis IN.simps*(*33*) *OUT.simps*(*33*) *singleton-iff*)

lemma *OUTfromChCorrect-data10*: *OUTfromChCorrect data10*
by (*simp add*: *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data11*: *OUTfromChCorrect data11*
by (*simp add*: *OUTfromChCorrect-def*, *metis* (*full-types*) *IN.simps*(*2*) *OUT.simps*(*2*) *OUT.simps*(*31*) *Un-empty-right Un-insert-left Un-insert-right in-*

sertI1)

lemma *OUTfromChCorrect-data12*: *OUTfromChCorrect data12*
by (*simp add*: *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data13*: *OUTfromChCorrect data13*
by (*simp add*: *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data14*: *OUTfromChCorrect data14*
by (*metis OUTfromCh.simps*(*14*) *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data15*: *OUTfromChCorrect data15*
by (*metis OUTfromCh.simps*(*15*) *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data16*: *OUTfromChCorrect data16*
by (*metis OUTfromCh.simps*(*16*) *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data17*: *OUTfromChCorrect data17*
proof −
have *data17* ∈ *OUT sA71* ∧ *data15* ∈ *IN sA71*
by (*metis IN.simps*(*19*) *OUT.simps*(*19*) *insertI1*)
thus *?thesis* **by** (*metis IN.simps*(*19*) *OUTfromCh.simps*(*17*) *OUTfromChCorrect-def*)

qed

lemma *OUTfromChCorrect-data18*: *OUTfromChCorrect data18*
by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*20*) *OUT.simps*(*20*) *insertI1*)

lemma *OUTfromChCorrect-data19*: *OUTfromChCorrect data19*
by (*metis OUTfromCh.simps*(*19*) *OUTfromChCorrect-def*)

lemma *OUTfromChCorrect-data20*: *OUTfromChCorrect data20*
by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*21*) *OUT.simps*(*21*) *insertI1 insert-subset subset-insertI*)

lemma *OUTfromChCorrect-data21*: *OUTfromChCorrect data21*
by (*simp add*: *OUTfromChCorrect-def*, *metis* (*full-types*) *IN.simps*(*22*) *OUT.simps*(*22*) *insertI1 insert-subset subset-insertI*)

lemma *OUTfromChCorrect-data22*: *OUTfromChCorrect data22*
by (*simp add*: *OUTfromChCorrect-def*, *metis* (*full-types*) *IN.simps*(*23*) *OUT.simps*(*23*) *insertI1*)

lemma *OUTfromChCorrect-data23*: *OUTfromChCorrect data23*
by (*simp add*: *OUTfromChCorrect-def*, *metis* (*full-types*) *IN.simps*(*9*) *OUT.simps*(*9*) *insert-subset subset-insertI*)

lemma *OUTfromChCorrect-data24*: *OUTfromChCorrect data24*

by (*simp add*: *OUTfromChCorrect-def*, *metis IN.simps*(*9*) *OUT.simps*(*9*) *insertI1* *insert-subset subset-insertI*)

lemma *OUTfromChCorrectSYSTEM-holds*: *OUTfromChCorrectSYSTEM*
by (*simp add*: *OUTfromChCorrectSYSTEM-def*, *clarify*, *case-tac x*, *simp add*: *OUTfromChCorrect-data1*, *simp add*: *OUTfromChCorrect-data2*, *simp add*: *OUTfromChCorrect-data3*, *simp add*: *OUTfromChCorrect-data4*, *simp add*: *OUTfromChCorrect-data5*, *simp add*: *OUTfromChCorrect-data6*, *simp add*: *OUTfromChCorrect-data7*, *simp add*: *OUTfromChCorrect-data8*, *simp add*: *OUTfromChCorrect-data9*, *simp add*: *OUTfromChCorrect-data10*, *simp add*: *OUTfromChCorrect-data11*, *simp add*: *OUTfromChCorrect-data12*, *simp add*: *OUTfromChCorrect-data13*, *simp add*: *OUTfromChCorrect-data14*, *simp add*: *OUTfromChCorrect-data15*, *simp add*: *OUTfromChCorrect-data16*, *simp add*: *OUTfromChCorrect-data17*, *simp add*: *OUTfromChCorrect-data18*, *simp add*: *OUTfromChCorrect-data19*, *simp add*: *OUTfromChCorrect-data20*, *simp add*: *OUTfromChCorrect-data21*, *simp add*: *OUTfromChCorrect-data22*, *simp add*: *OUTfromChCorrect-data23*, *simp add*: *OUTfromChCorrect-data24*)

lemma *OUTfromVCorrect1-data1*: *OUTfromVCorrect1 data1*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data2*: *OUTfromVCorrect1 data2*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data3*: *OUTfromVCorrect1 data3*
proof −
have *data3* ∈ *OUT sA41* ∧ *stA4* ∈ *VAR sA41*
by (*metis OUT.simps*(*17*) *VAR.simps*(*17*) *insertI1*)
thus *?thesis* **by** (*metis OUTfromV.simps*(*3*) *OUTfromVCorrect1-def VAR.simps*(*17*))

qed

lemma *OUTfromVCorrect1-data4*: *OUTfromVCorrect1 data4*
by (*simp add*: *OUTfromVCorrect1-def*, *metis* (*full-types*) *OUT.simps*(*2*) *VAR.simps*(*2*) *insertI1*)

lemma *OUTfromVCorrect1-data5*: *OUTfromVCorrect1 data5*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data6*: *OUTfromVCorrect1 data6*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data7*: *OUTfromVCorrect1 data7*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data8*: *OUTfromVCorrect1 data8*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data9*: *OUTfromVCorrect1 data9*

by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data10*: *OUTfromVCorrect1 data10*
proof −
have *data10* ∈ *OUT sA12* ∧ *stA1* ∈ *VAR sA12*
by (*metis OUT.simps*(*11*) *VAR.simps*(*11*) *insertI1*)
thus *?thesis* **by** (*metis OUT.simps*(*26*) *OUTfromV.simps*(*10*) *OUTfromVCorrect1-def VAR.simps*(*26*) *insertI1*)
qed

lemma *OUTfromVCorrect1-data11*: *OUTfromVCorrect1 data11*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data12*: *OUTfromVCorrect1 data12*
proof −
have *data12* ∈ *OUT sA22* ∧ *stA2* ∈ *VAR sA22*
by (*metis* (*full-types*) *OUT.simps*(*13*) *VAR.simps*(*13*) *insertCI*)
thus *?thesis* **by** (*metis OUTfromV.simps*(*12*) *OUTfromVCorrect1-def VAR.simps*(*13*))

qed

lemma *OUTfromVCorrect1-data13*: *OUTfromVCorrect1 data13*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data14*: *OUTfromVCorrect1 data14*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data15*: *OUTfromVCorrect1 data15*
proof −
have *A6ch*:*data15* ∈ *OUT sA6* ∧ *stA6* ∈ *VAR sA6*
by (*metis OUT.simps*(*6*) *VAR.simps*(*6*) *insertI1*)
thus *?thesis* **by** (*simp add*: *OUTfromVCorrect1-def*, *metis A6ch*)
qed

lemma *OUTfromVCorrect1-data16*: *OUTfromVCorrect1 data16*
proof −
have *A6ch*:*data16* ∈ *OUT sA6* ∧ *stA6* ∈ *VAR sA6*
by (*metis* (*full-types*) *OUT.simps*(*6*) *VAR.simps*(*6*) *insertCI*)
thus *?thesis* **by** (*simp add*: *OUTfromVCorrect1-def*, *metis A6ch*)
qed

lemma *OUTfromVCorrect1-data17*: *OUTfromVCorrect1 data17*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data18*: *OUTfromVCorrect1 data18*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data19*: *OUTfromVCorrect1 data19*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data20*: *OUTfromVCorrect1 data20*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data21*: *OUTfromVCorrect1 data21*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data22*: *OUTfromVCorrect1 data22*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data23*: *OUTfromVCorrect1 data23*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1-data24*: *OUTfromVCorrect1 data24*
by (*simp add*: *OUTfromVCorrect1-def*)

lemma *OUTfromVCorrect1SYSTEM-holds*: *OUTfromVCorrect1SYSTEM*
by (*simp add*: *OUTfromVCorrect1SYSTEM-def*, *clarify*, *case-tac x*,
simp add: *OUTfromVCorrect1-data1*, *simp add*: *OUTfromVCorrect1-data2*,
simp add: *OUTfromVCorrect1-data3*, *simp add*: *OUTfromVCorrect1-data4*,
simp add: *OUTfromVCorrect1-data5*, *simp add*: *OUTfromVCorrect1-data6*,
simp add: *OUTfromVCorrect1-data7*, *simp add*: *OUTfromVCorrect1-data8*,
simp add: *OUTfromVCorrect1-data9*, *simp add*: *OUTfromVCorrect1-data10*,
simp add: *OUTfromVCorrect1-data11*, *simp add*: *OUTfromVCorrect1-data12*,
simp add: *OUTfromVCorrect1-data13*, *simp add*: *OUTfromVCorrect1-data14*,
simp add: *OUTfromVCorrect1-data15*, *simp add*: *OUTfromVCorrect1-data16*,
simp add: *OUTfromVCorrect1-data17*, *simp add*: *OUTfromVCorrect1-data18*,
simp add: *OUTfromVCorrect1-data19*, *simp add*: *OUTfromVCorrect1-data20*,
simp add: *OUTfromVCorrect1-data21*, *simp add*: *OUTfromVCorrect1-data22*,
simp add: *OUTfromVCorrect1-data23*, *simp add*: *OUTfromVCorrect1-data24*)

lemma *OUTfromVCorrect2SYSTEM*: *OUTfromVCorrect2SYSTEM*
by (*simp add*: *OUTfromVCorrect2SYSTEM-def*, *auto*, *case-tac x*,
((*simp add*: *OUTfromVCorrect2-def*, *auto*, *case-tac v*, *auto*) |
(*simp add*: *OUTfromVCorrect2-def*))+)

lemma *OUTfromV-VARto-holds*:
OUTfromV-VARto
by (*simp add*: *OUTfromV-VARto-def*, *auto*, (*case-tac x*, *auto*), (*case-tac v*, *auto*))

lemma *VARfromCorrectSYSTEM-holds*:
VARfromCorrectSYSTEM
by (*simp add*: *VARfromCorrectSYSTEM-def AbstrLevel0 AbstrLevel1*)

lemma *VARtoCorrectSYSTEM-holds*:
VARtoCorrectSYSTEM
by (*simp add*: *VARtoCorrectSYSTEM-def AbstrLevel0 AbstrLevel1*)

lemma *VARusefulSYSTEM-holds*:

VARusefulSYSTEM
by (*simp add*: *VARusefulSYSTEM-def*, *auto*, *case-tac v*, *auto*)

4.3 Elementary components

— On the abstraction level 0 only the components sA5 and sA6 are elementary

lemma *NOT-elementaryCompDD-sA1*: ¬ *elementaryCompDD sA1*
proof −
have *outSetCorelated data2* ∩ *outSetCorelated data10* = {}
by (*metis OUTfromV.simps*(*2*) *inf-bot-left outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

lemma *NOT-elementaryCompDD-sA2*: ¬ *elementaryCompDD sA2*
proof −
have *outSetCorelated data5* ∩ *outSetCorelated data11* = {}
by (*metis OUTfromV.simps*(*5*) *inf-bot-right inf-commute outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

lemma *NOT-elementaryCompDD-sA3*: ¬ *elementaryCompDD sA3*
proof −
have *outSetCorelated data6* ∩ *outSetCorelated data7* = {}
by (*metis OUTfromV.simps*(*7*) *inf-bot-right outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

lemma *NOT-elementaryCompDD-sA4*: ¬ *elementaryCompDD sA4*
proof −
have *outSetCorelated data3* ∩ *outSetCorelated data8* = {}
by (*metis OUTfromV.simps*(*8*) *inf-bot-left inf-commute outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

lemma *elementaryCompDD-sA5*: *elementaryCompDD sA5*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA6*: *elementaryCompDD sA6*
proof −
have *oSet15*:*outSetCorelated data15* ≠ {}
by (*simp add*: *outSetCorelated-def*, *auto*)
have *oSet16*:*outSetCorelated data16* ≠ {}
by (*simp add*: *outSetCorelated-def*, *auto*)
have *outSetCorelated data15* ∩ *outSetCorelated data16* ≠ {}
by (*simp add*: *outSetCorelated-def*, *auto*)
with *oSet15 oSet16* **show** *?thesis* **by** (*simp add*: *elementaryCompDD-def*, *auto*)

qed

lemma *NOT-elementaryCompDD-sA7*: ¬ *elementaryCompDD sA7*
proof −
have *outSetCorelated data17* ∩ *outSetCorelated data18* = {}
by (*metis* (*full-types*) *OUTfromV.simps*(*17*) *disjoint-iff-not-equal empty-iff outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

lemma *NOT-elementaryCompDD-sA8*: ¬ *elementaryCompDD sA8*
proof −
have *outSetCorelated data20* ∩ *outSetCorelated data21* = {}
by (*metis OUTfromV.simps*(*21*) *inf-bot-right outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

lemma *NOT-elementaryCompDD-sA9*: ¬ *elementaryCompDD sA9*
proof −
have *outSetCorelated data23* ∩ *outSetCorelated data24* = {}
by (*metis* (*full-types*) *OUTfromV.simps*(*23*) *disjoint-iff-not-equal empty-iff outSetCorelatedEmpty1*)
thus *?thesis* **by** (*simp add*: *elementaryCompDD-def*)
qed

— On the abstraction level 1 all components are elementary

lemma *elementaryCompDD-sA11*: *elementaryCompDD sA11*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA12*: *elementaryCompDD sA12*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA21*: *elementaryCompDD sA21*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA22*: *elementaryCompDD sA22*
proof −
have *oSet4*:*outSetCorelated data4* ≠ {}
by (*simp add*: *outSetCorelated-def*, *auto*)
have *oSet12*:*outSetCorelated data12* ≠ {}
by (*simp add*: *outSetCorelated-def*, *auto*)
have *outSetCorelated data4* ∩ *outSetCorelated data12* ≠ {}
by (*simp add*: *outSetCorelated-def*, *auto*)
with *oSet4 oSet12* **show** *?thesis*
by (*simp add*: *elementaryCompDD-def*, *auto*)
qed

lemma *elementaryCompDD-sA23*: *elementaryCompDD sA23*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA31*: *elementaryCompDD sA31*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA32*: *elementaryCompDD sA32*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA41*: *elementaryCompDD sA41*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA42*: *elementaryCompDD sA42*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA71*: *elementaryCompDD sA71*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA72*: *elementaryCompDD sA72*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA81*: *elementaryCompDD sA81*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA82*: *elementaryCompDD sA82*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA91*: *elementaryCompDD sA91*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA92*: *elementaryCompDD sA92*
by (*simp add*: *elementaryCompDD-def*)

lemma *elementaryCompDD-sA93*: *elementaryCompDD sA93*
by (*simp add*: *elementaryCompDD-def*)

4.4 Source components

— Abstraction level 0

lemma *A5-NotDSource-level0*: *isNotDSource level0 sA5*
by (*simp add*: *isNotDSource-def*, *auto*, *case-tac Z*, *auto*)

lemma *DSourcesA1-L0*: *DSources level0 sA1* = {}
by (*simp add*: *DSources-def*, *auto*, *case-tac x*, *auto*)

lemma *DSourcesA2-L0*: *DSources level0 sA2* = { *sA1*, *sA4*}
by (*simp add*: *DSources-def AbstrLevel0*, *auto*)

lemma *DSourcesA3-L0*: *DSources level0 sA3* = { *sA2* }

by (*simp add*: *DSources-def AbstrLevel0*, *auto*)

lemma *DSourcesA4-L0*: *DSources level0 sA4* = { *sA3* }
by (*simp add*: *DSources-def AbstrLevel0*, *auto*)

lemma *DSourcesA5-L0*: *DSources level0 sA5* = { *sA4* }
by (*simp add*: *DSources-def AbstrLevel0*, *auto*)

lemma *DSourcesA6-L0*: *DSources level0 sA6* = {}
by (*simp add*: *DSources-def*, *auto*, *case-tac x*, *auto*)

lemma *DSourcesA7-L0*: *DSources level0 sA7* = {*sA6*}
by (*simp add*: *DSources-def AbstrLevel0*, *auto*)

lemma *DSourcesA8-L0*: *DSources level0 sA8* = {*sA7*, *sA9*}
by (*simp add*: *DSources-def AbstrLevel0*, *force*)

lemma *DSourcesA9-L0*: *DSources level0 sA9* = {*sA8*}
by (*simp add*: *DSources-def AbstrLevel0*, *auto*)

lemma *A1-DAcc-level0*: *DAcc level0 sA1* = { *sA2* }
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A2-DAcc-level0*: *DAcc level0 sA2* = { *sA3* }
by (*simp add*: *DAcc-def AbstrLevel0*, *force*)

lemma *A3-DAcc-level0*: *DAcc level0 sA3* = { *sA4* }
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A4-DAcc-level0*: *DAcc level0 sA4* = { *sA2*, *sA5* }
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A5-DAcc-level0*: *DAcc level0 sA5* = {}
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A6-DAcc-level0*: *DAcc level0 sA6* = { *sA7* }
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A7-DAcc-level0*: *DAcc level0 sA7* = { *sA8* }
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A8-DAcc-level0*: *DAcc level0 sA8* = { *sA9* }
by (*simp add*: *DAcc-def AbstrLevel0*, *auto*)

lemma *A9-DAcc-level0*: *DAcc level0 sA9* = { *sA8* }
by (*simp add*: *DAcc-def AbstrLevel0*, *force*)

lemma *A8-NSources*:
$\forall\ C \in (AbstrLevel\ level0).\ (C \neq sA9 \wedge C \neq sA8 \longrightarrow sA8 \notin (Sources\ level0\ C))$

by (*metis A8-DAcc-level0 A9-DAcc-level0 singleDSourceLoop*)

lemma *A9-NSources*:
$\forall\ C \in (AbstrLevel\ level0).\ (C \neq sA9 \wedge C \neq sA8 \longrightarrow sA9 \notin (Sources\ level0\ C))$
by (*metis A8-DAcc-level0 A9-DAcc-level0 singleDSourceLoop*)

lemma *A7-Acc*:
$(Acc\ level0\ sA7) = \{sA8, sA9\}$
by (*metis A7-DAcc-level0 A8-DAcc-level0 A9-DAcc-level0 AccDef AccSigleLoop insert-commute*)

lemma *A7-NSources*:
$\forall\ C \in (AbstrLevel\ level0).\ (C \neq sA9 \wedge C \neq sA8 \longrightarrow sA7 \notin (Sources\ level0\ C))$
by (*metis A7-Acc Acc-Sources insert-iff singleton-iff*)

lemma *A5-Acc*: $(Acc\ level0\ sA5) = \{\}$
by (*metis A5-NotDSource-level0 isNotDSource-EmptyAcc*)

lemma *A6-Acc*:
$(Acc\ level0\ sA6) = \{sA7, sA8, sA9\}$
proof −
have *daA6*: $DAcc\ level0\ sA6 = \{\ sA7\ \}$ **by** (*rule A6-DAcc-level0*)
hence $(\bigcup\ S \in (DAcc\ level0\ sA6).\ (Acc\ level0\ S)) = (Acc\ level0\ sA7)$ **by** *simp*
hence *aA6*:$(\bigcup\ S \in (DAcc\ level0\ sA6).\ (Acc\ level0\ S)) = \{\ sA8, sA9\ \}$ **by** (*simp add*: *A7-Acc*)
have $(Acc\ level0\ sA6) = (DAcc\ level0\ sA6) \cup (\bigcup\ S \in (DAcc\ level0\ sA6).\ (Acc\ level0\ S))$
by (*rule AccDef*)
with *daA6 aA6* **show** *?thesis* **by** *auto*
qed

lemma *A6-NSources*:
$\forall\ C \in (AbstrLevel\ level0).\ (C \neq sA9 \wedge C \neq sA8 \wedge C \neq sA7 \longrightarrow sA6 \notin (Sources\ level0\ C))$
by (*metis* (*full-types*) *A6-Acc A7-Acc Acc-SourcesNOT insert-iff singleton-iff*)

lemma *SourcesA1-L0*: $Sources\ level0\ sA1 = \{\}$
by (*simp add*: *DSourcesA1-L0 DSourcesEmptySources*)

lemma *SourcesA2-L0*: $Sources\ level0\ sA2 = \{\ sA1, sA2, sA3, sA4\ \}$
proof
show $Sources\ level0\ sA2 \subseteq \{sA1, sA2, sA3, sA4\}$
proof −
have *A2level0*:$sA2 \in (AbstrLevel\ level0)$ **by** (*simp add*: *AbstrLevel0*)
have *sgA5*:$sA5 \notin Sources\ level0\ sA2$
by (*metis A5-NotDSource-level0 DSource-level NoDSourceNoSource allNotDSource-NotSource isNotSource-Sources*)
from *A2level0* **have** *sgA6*:$sA6 \notin Sources\ level0\ sA2$ **by** (*simp add*: *A6-NSources*)
from *A2level0* **have** *sgA7*:$sA7 \notin Sources\ level0\ sA2$ **by** (*simp add*: *A7-NSources*)

```
   from A2level0 have sgA8:sA8 ∉ Sources level0 sA2 by (simp add: A8-NSources)
   from A2level0 have sgA9:sA9 ∉ Sources level0 sA2 by (simp add: A9-NSources)
    have Sources level0 sA2 ⊆ {sA1, sA2, sA3, sA4, sA5, sA6, sA7, sA8, sA9}
      by (metis AbstrLevel0 SourcesLevelX)
   with sgA5 sgA6 sgA7 sgA8 sgA9 show Sources level0 sA2 ⊆ {sA1, sA2, sA3,
sA4}
      by blast
  qed
next
  show {sA1, sA2, sA3, sA4} ⊆ Sources level0 sA2
  proof −
    have dsA4:{ sA3 } ⊆ Sources level0 sA2
      by (metis DSource-Sources DSourcesA2-L0 DSourcesA4-L0
          Sources-DSources insertI1 insert-commute subset-trans)
    have { sA2 } ⊆ Sources level0 sA2
     by (metis DSource-Sources DSourcesA2-L0 DSourcesA3-L0
          DSourcesA4-L0 Sources-DSources insertI1
          insert-commute subset-trans)
    with dsA4 show {sA1, sA2, sA3, sA4} ⊆ Sources level0 sA2
      by (metis DSourcesA2-L0 Sources-DSources insert-subset)
   qed
qed

lemma SourcesA3-L0: Sources level0 sA3 = { sA1, sA2, sA3, sA4 }
proof
  show Sources level0 sA3 ⊆ {sA1, sA2, sA3, sA4}
  proof −
   have a2:Sources level0 sA2 = { sA1, sA2, sA3, sA4} by (simp add: SourcesA2-L0)
    have { sA2 } ⊆ DSources level0 sA3 by (simp add: DSourcesA3-L0)
    with a2 show Sources level0 sA3 ⊆ {sA1, sA2, sA3, sA4}
     by (metis DSource-Sources DSourcesA2-L0 DSourcesA4-L0 insertI1 insert-commute
subset-trans)
  qed
next
   show {sA1, sA2, sA3, sA4} ⊆ Sources level0 sA3
   by (metis (full-types) DSource-Sources DSourcesA3-L0  SourcesA2-L0 insertI1)
qed

lemma SourcesA4-L0: Sources level0 sA4 = { sA1, sA2, sA3, sA4 }
proof −
  have  A3s:Sources level0 sA3 = { sA1, sA2, sA3, sA4 } by (rule  SourcesA3-L0)
  have  Sources level0 sA4 = {sA3} ∪ Sources level0 sA3
    by (metis DSourcesA4-L0 Sources-singleDSource)
  with A3s show ?thesis by auto
qed

lemma SourcesA5-L0: Sources level0 sA5 = { sA1, sA2, sA3, sA4 }
proof −
  have  A4s:Sources level0 sA4 = { sA1, sA2, sA3, sA4 } by (rule  SourcesA4-L0)
```

have *Sources level0 sA5* = {*sA4*} ∪ *Sources level0 sA4*
by (*metis DSourcesA5-L0 Sources-singleDSource*)
with *A4s* **show** *?thesis* **by** *auto*
qed

lemma *SourcesA6-L0*: *Sources level0 sA6* = {}
by (*simp add*: *DSourcesA6-L0 DSourcesEmptySources*)

lemma *SourcesA7-L0*: *Sources level0 sA7* = { *sA6* }
by (*metis DSourcesA7-L0 SourcesA6-L0 SourcesEmptyDSources SourcesOnlyDSources singleton-iff*)

lemma *SourcesA8-L0*: *Sources level0 sA8* = { *sA6*, *sA7*, *sA8*, *sA9* }
proof −
have *dA8*:*DSources level0 sA8* = {*sA7*, *sA9*} **by** (*rule DSourcesA8-L0*)
have *dA9*:*DSources level0 sA9* = {*sA8*} **by** (*rule DSourcesA9-L0*)
have (*Sources level0 sA8*) = (*DSources level0 sA8*) ∪ (⋃ *S* ∈ (*DSources level0 sA8*). (*Sources level0 S*))
by (*rule SourcesDef*)
hence *sourcesA8*:(*Sources level0 sA8*) = ({*sA7*, *sA9*, *sA6*} ∪ (*Sources level0 sA9*))
by (*simp add*: *DSourcesA8-L0 SourcesA7-L0*, *auto*)
have (*Sources level0 sA9*) = (*DSources level0 sA9*) ∪ (⋃ *S* ∈ (*DSources level0 sA9*). (*Sources level0 S*))
by (*rule SourcesDef*)
hence (*Sources level0 sA9*) = ({*sA8*} ∪ (*Sources level0 sA8*))
by (*simp add*: *DSourcesA9-L0*)
with *sourcesA8* **have** (*Sources level0 sA8*) = {*sA7*, *sA9*, *sA6*} ∪ {*sA8*} ∪ {*sA8*, *sA9*}
by (*metis SourcesLoop*)
thus *?thesis* **by** *auto*
qed

lemma *SourcesA9-L0*: *Sources level0 sA9* = { *sA6*, *sA7*, *sA8*, *sA9* }
proof −
have (*Sources level0 sA9*) = (*DSources level0 sA9*) ∪ (⋃ *S* ∈ (*DSources level0 sA9*). (*Sources level0 S*))
by (*rule SourcesDef*)
hence *sourcesA9*:(*Sources level0 sA9*) = ({*sA8*} ∪ (*Sources level0 sA8*))
by (*simp add*: *DSourcesA9-L0*)
thus *?thesis* **by** (*metis SourcesA8-L0 Un-insert-right insert-absorb2 insert-is-Un*)

qed

— Abstraction level 1

lemma *A12-NotSource-level1*: *isNotDSource level1 sA12*

by (*simp add*: *isNotDSource-def*, *auto*, *case-tac Z*, *auto*)

lemma *A21-NotSource-level1*: *isNotDSource level1 sA21*
by (*simp add*: *isNotDSource-def*, *auto*, *case-tac Z*, *auto*)

lemma *A5-NotSource-level1*: *isNotDSource level1 sA5*
by (*simp add*: *isNotDSource-def*, *auto*, *case-tac Z*, *auto*)

lemma *A92-NotSource-level1*: *isNotDSource level1 sA92*
by (*simp add*: *isNotDSource-def*, *auto*, *case-tac Z*, *auto*)

lemma *A93-NotSource-level1*: *isNotDSource level1 sA93*
by (*simp add*: *isNotDSource-def*, *auto*, *case-tac Z*, *auto*)

lemma *A11-DAcc-level1*: *DAcc level1 sA11* = { *sA21*, *sA22*, *sA23* }
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A12-DAcc-level1*: *DAcc level1 sA12* = {}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A21-DAcc-level1*: *DAcc level1 sA21* = {}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A22-DAcc-level1*: *DAcc level1 sA22* = {*sA31*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A23-DAcc-level1*: *DAcc level1 sA23* = {*sA32*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A31-DAcc-level1*: *DAcc level1 sA31* = {*sA41*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A32-DAcc-level1*: *DAcc level1 sA32* = {*sA41*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A41-DAcc-level1*: *DAcc level1 sA41* = {*sA22*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A42-DAcc-level1*: *DAcc level1 sA42* = {*sA5*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A5-DAcc-level1*: *DAcc level1 sA5* = {}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A6-DAcc-level1*: *DAcc level1 sA6* = {*sA71*, *sA72*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A71-DAcc-level1*: *DAcc level1 sA71* = {*sA81*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A72-DAcc-level1*: *DAcc level1 sA72* = {*sA82*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A81-DAcc-level1*: *DAcc level1 sA81* = {*sA91*, *sA92*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A82-DAcc-level1*: *DAcc level1 sA82* = {*sA93*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A91-DAcc-level1*: *DAcc level1 sA91* = {*sA81*}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A92-DAcc-level1*: *DAcc level1 sA92* = {}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A93-DAcc-level1*: *DAcc level1 sA93* = {}
by (*simp add*: *DAcc-def AbstrLevel1*, *auto*)

lemma *A42-NSources-L1*:
∀ *C* ∈ (*AbstrLevel level1*). *C* ≠ *sA5* ⟶ *sA42* ∉ (*Sources level1 C*)
by (*metis A42-DAcc-level1 A5-NotSource-level1 singleDSourceEmpty4isNotSource*)

lemma *A5-NotSourceSet-level1* :
∀ *C* ∈ (*AbstrLevel level1*). *sA5* ∉ (*Sources level1 C*)
by (*metis A5-NotSource-level1 isNotSource-Sources*)

lemma *A92-NotSourceSet-level1* :
∀ *C* ∈ (*AbstrLevel level1*). *sA92* ∉ (*Sources level1 C*)
by (*metis A92-NotSource-level1 isNotSource-Sources*)

lemma *A93-NotSourceSet-level1* :
∀ *C* ∈ (*AbstrLevel level1*). *sA93* ∉ (*Sources level1 C*)
by (*metis A93-NotSource-level1 isNotSource-Sources*)

lemma *DSourcesA11-L1*: *DSources level1 sA11* = {}
by (*simp add*: *DSources-def*, *auto*, *case-tac x*, *auto*)

lemma *DSourcesA12-L1*: *DSources level1 sA12* = {}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA21-L1*: *DSources level1 sA21* = {*sA11*}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA22-L1*: *DSources level1 sA22* = {*sA11*, *sA41*}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA23-L1*: *DSources level1 sA23* = {*sA11*}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA31-L1*: *DSources level1 sA31* = { *sA22* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA32-L1*: *DSources level1 sA32* = { *sA23* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA41-L1*: *DSources level1 sA41* = { *sA31*, *sA32* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA42-L1*: *DSources level1 sA42* = {}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA5-L1*: *DSources level1 sA5* = { *sA42* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA6-L1*: *DSources level1 sA6* = {}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA71-L1*: *DSources level1 sA71* = { *sA6* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA72-L1*: *DSources level1 sA72* = { *sA6* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA81-L1*: *DSources level1 sA81* = { *sA71*, *sA91* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA82-L1*: *DSources level1 sA82* = { *sA72* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA91-L1*: *DSources level1 sA91* = { *sA81* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA92-L1*: *DSources level1 sA92* = { *sA81* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *DSourcesA93-L1*: *DSources level1 sA93* = { *sA82* }
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)

lemma *A82-Acc*: (*Acc level1 sA82*) = {*sA93*}
by (*metis A82-DAcc-level1 A93-NotSource-level1 singleDSourceEmpty-Acc*)

lemma *A82-NSources-L1*:
∀ *C* ∈ (*AbstrLevel level1*). (*C* ≠ *sA93* ⟶ *sA82* ∉ (*Sources level1 C*))
by (*metis A82-Acc Acc-Sources singleton-iff*)

lemma *A72-Acc*: (*Acc level1 sA72*) = {*sA82*, *sA93*}
proof −

have *daA72*: *DAcc level1 sA72* = { *sA82* } **by** (*rule A72-DAcc-level1*)
hence (⋃ *S* ∈ (*DAcc level1 sA72*). (*Acc level1 S*)) = (*Acc level1 sA82*) **by** *simp*
hence *aA72*:(⋃ *S* ∈ (*DAcc level1 sA72*). (*Acc level1 S*)) = { *sA93* } **by** (*simp add*: *A82-Acc*)
have (*Acc level1 sA72*) = (*DAcc level1 sA72*) ∪ (⋃ *S* ∈ (*DAcc level1 sA72*). (*Acc level1 S*))
by (*rule AccDef*)
with *daA72 aA72* **show** *?thesis* **by** *auto*
qed

lemma *A72-NSources-L1*:
∀ *C* ∈ (*AbstrLevel level1*). (*C* ≠ *sA93* ∧ *C* ≠ *sA82* ⟶ *sA72* ∉ (*Sources level1 C*)) **by** (*metis A72-Acc Acc-Sources insert-iff singleton-iff*)

lemma *A92-Acc*: (*Acc level1 sA92*) = {}
by (*metis A92-NotSource-level1 isNotDSource-EmptyAcc*)

lemma *A92-NSources-L1*:
∀ *C* ∈ (*AbstrLevel level1*). (*sA92* ∉ (*Sources level1 C*))
by (*metis A92-NotSourceSet-level1*)

lemma *A91-Acc*: (*Acc level1 sA91*) = {*sA81*, *sA91*, *sA92*}
proof −
have *da91*: *DAcc level1 sA91* = { *sA81* } **by** (*rule A91-DAcc-level1*)
hence *a91*:(⋃ *S* ∈ (*DAcc level1 sA91*). (*Acc level1 S*)) = (*Acc level1 sA81*) **by** *simp*
have (*Acc level1 sA91*) = (*DAcc level1 sA91*) ∪ (⋃ *S* ∈ (*DAcc level1 sA91*). (*Acc level1 S*)) **by** (*rule AccDef*)
with *da91 a91* **have** *acc91*:(*Acc level1 sA91*) = { *sA81* } ∪ (*Acc level1 sA81*) **by** *simp*
have *da81*: *DAcc level1 sA81* = { *sA91*, *sA92* } **by** (*rule A81-DAcc-level1*)
hence *a81*:(⋃ *S* ∈ (*DAcc level1 sA81*). (*Acc level1 S*)) = (*Acc level1 sA92*) ∪ (*Acc level1 sA91*) **by** *auto*
have (*Acc level1 sA81*) = (*DAcc level1 sA81*) ∪ (⋃ *S* ∈ (*DAcc level1 sA81*). (*Acc level1 S*)) **by** (*rule AccDef*)
with *da81 a81* **have** *acc81*: (*Acc level1 sA81*) = { *sA91*, *sA92* } ∪ (*Acc level1 sA91*)
by (*metis A92-Acc sup-bot.left-neutral*)
from *acc91 acc81* **have** (*Acc level1 sA91*) = { *sA81* } ∪ { *sA91*, *sA92* } ∪ {*sA91*, *sA81*}
by (*metis AccLoop*)
thus *?thesis* **by** *auto*
qed

lemma *A91-NSources-L1*:
∀ *C* ∈ (*AbstrLevel level1*). (*C* ≠ *sA92* ∧ *C* ≠ *sA91* ∧ *C* ≠ *sA81* ⟶ *sA91* ∉ (*Sources level1 C*))
proof −
have ∀ *C* ∈ (*AbstrLevel level1*). (*C* ≠ *sA92* ∧ *C* ≠ *sA91* ∧ *C* ≠ *sA81* ⟶ (*C*

$\notin$ (*Acc level1 sA91*)))
by (*metis A91-Acc insert-iff singleton-iff*)
thus *?thesis* **by** (*metis Acc-SourcesNOT*)
qed

lemma *A81-Acc*: (*Acc level1 sA81*) = {*sA81*, *sA91*, *sA92*}
proof −
have *da91*: *DAcc level1 sA91* = { *sA81* } **by** (*rule A91-DAcc-level1*)
hence *a91*:($\bigcup$ *S* ∈ (*DAcc level1 sA91*). (*Acc level1 S*)) = (*Acc level1 sA81*) **by** *simp*
have (*Acc level1 sA91*) = (*DAcc level1 sA91*) ∪ ($\bigcup$ *S* ∈ (*DAcc level1 sA91*). (*Acc level1 S*)) **by** (*rule AccDef*)
with *da91 a91* **have** *acc91*:(*Acc level1 sA91*) = { *sA81* } ∪ (*Acc level1 sA81*) **by** *simp*
have *da81*: *DAcc level1 sA81* = { *sA91*, *sA92* } **by** (*rule A81-DAcc-level1*)
hence *a81*:($\bigcup$ *S* ∈ (*DAcc level1 sA81*). (*Acc level1 S*)) = (*Acc level1 sA92*) ∪ (*Acc level1 sA91*) **by** *auto*
have (*Acc level1 sA81*) = (*DAcc level1 sA81*) ∪ ($\bigcup$ *S* ∈ (*DAcc level1 sA81*). (*Acc level1 S*)) **by** (*rule AccDef*)
with *da81 a81* **have** *acc81*: (*Acc level1 sA81*) = { *sA91*, *sA92* } ∪ (*Acc level1 sA91*)
by (*metis A92-Acc sup-bot.left-neutral*)
from *acc81 acc91* **have** (*Acc level1 sA81*) = { *sA91*, *sA92* } ∪ { *sA81* } ∪ {*sA81*, *sA91*}
by (*metis AccLoop*)
thus *?thesis* **by** *auto*
qed

lemma *A81-NSources-L1*:
∀ *C* ∈ (*AbstrLevel level1*). (*C* ≠ *sA92* ∧ *C* ≠ *sA91* ∧ *C* ≠ *sA81* ⟶ *sA81* ∉ (*Sources level1 C*))
proof −
have ∀ *C* ∈ (*AbstrLevel level1*). (*C* ≠ *sA92* ∧ *C* ≠ *sA91* ∧ *C* ≠ *sA81* ⟶ (*C* ∉ (*Acc level1 sA81*)))
by (*metis A81-Acc insert-iff singleton-iff*)
thus *?thesis* **by** (*metis Acc-SourcesNOT*)
qed

lemma *A71-Acc*: (*Acc level1 sA71*) = {*sA81*, *sA91*, *sA92*}
proof −
have *da71*: *DAcc level1 sA71* = { *sA81* } **by** (*rule A71-DAcc-level1*)
hence *a71*:($\bigcup$ *S* ∈ (*DAcc level1 sA71*). (*Acc level1 S*)) = (*Acc level1 sA81*) **by** *simp*
have (*Acc level1 sA71*) = (*DAcc level1 sA71*) ∪ ($\bigcup$ *S* ∈ (*DAcc level1 sA71*). (*Acc level1 S*)) **by** (*rule AccDef*)
with *da71 a71* **show** *?thesis* **by** (*metis A91-Acc A91-DAcc-level1 AccDef*)
qed

lemma *A71-NSources-L1*:

$\forall\ C \in (AbstrLevel\ level1).\ (C \neq sA92 \wedge C \neq sA91 \wedge C \neq sA81 \longrightarrow sA71 \notin (Sources\ level1\ C))$
proof −
have $\forall\ C \in (AbstrLevel\ level1).\ (C \neq sA92 \wedge C \neq sA91 \wedge C \neq sA81 \longrightarrow (C \notin (Acc\ level1\ sA71)))$
by (*metis A71-Acc insert-iff singleton-iff*)
thus *?thesis* **by** (*metis Acc-SourcesNOT*)
qed

lemma *A6-Acc-L1*:
$(Acc\ level1\ sA6) = \{sA71, sA72, sA81, sA82, sA91, sA92, sA93\}$
proof −
have *daA6*: $DAcc\ level1\ sA6 = \{\ sA71, sA72\ \}$ **by** (*rule A6-DAcc-level1*)
hence $(\bigcup\ S \in (DAcc\ level1\ sA6).\ (Acc\ level1\ S)) = (Acc\ level1\ sA71) \cup (Acc\ level1\ sA72)$ **by** *simp*
hence *aA6*:$(\bigcup\ S \in (DAcc\ level1\ sA6).\ (Acc\ level1\ S)) = \{sA81, sA91, sA92\} \cup \{sA82, sA93\}$
by (*simp add*: *A71-Acc A72-Acc*)
have $(Acc\ level1\ sA6) = (DAcc\ level1\ sA6) \cup (\bigcup\ S \in (DAcc\ level1\ sA6).\ (Acc\ level1\ S))$
by (*rule AccDef*)
with *daA6 aA6* **show** *?thesis* **by** *auto*
qed

lemma *A6-NSources-L1Acc*:
$\forall\ C \in (AbstrLevel\ level1).\ (C \notin (Acc\ level1\ sA6) \longrightarrow sA6 \notin (Sources\ level1\ C))$
by (*metis Acc-SourcesNOT*)

lemma *A6-NSources-L1*:
$\forall\ C \in (AbstrLevel\ level1).\ (C \neq sA93 \wedge C \neq sA92 \wedge C \neq sA91 \wedge C \neq sA82 \wedge C \neq sA81 \wedge C \neq sA72 \wedge C \neq sA71$
$\longrightarrow sA6 \notin (Sources\ level1\ C))$
proof −
have $\forall\ C \in (AbstrLevel\ level1).$
$(C \neq sA93 \wedge C \neq sA92 \wedge C \neq sA91 \wedge C \neq sA82 \wedge C \neq sA81 \wedge C \neq sA72 \wedge C \neq sA71$
$\longrightarrow (C \notin (Acc\ level1\ sA6)))$
by (*metis A6-Acc-L1 empty-iff insert-iff*)
thus *?thesis* **by** (*metis Acc-SourcesNOT*)
qed

lemma *A5-Acc-L1*: $(Acc\ level1\ sA5) = \{\}$
by (*metis A5-NotSource-level1 isNotDSource-EmptyAcc*)

lemma *SourcesA11-L1*: $Sources\ level1\ sA11 = \{\}$
by (*simp add*: *DSourcesA11-L1 DSourcesEmptySources*)

lemma *SourcesA12-L1*: $Sources\ level1\ sA12 = \{\}$
by (*simp add*: *DSourcesA12-L1 DSourcesEmptySources*)

lemma *SourcesA21-L1*: *Sources level1 sA21* = {*sA11*}
by (*simp add*: *DSourcesA21-L1 SourcesA11-L1 Sources-singleDSource*)

lemma *SourcesA22-L1*: *Sources level1 sA22* = {*sA11*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*}
proof
show *Sources level1 sA22* ⊆ {*sA11*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*}
proof −
have *A2level1*:*sA22* ∈ (*AbstrLevel level1*) **by** (*simp add*: *AbstrLevel1*)
from *A2level1* **have** *sgA42*:*sA42* ∉ *Sources level1 sA22* **by** (*metis A42-NSources-L1 CSet.distinct*(*347*))
have *sgA5*:*sA5* ∉ *Sources level1 sA22*
by (*metis A5-NotSource-level1 Acc-Sources all-not-in-conv isNotDSource-EmptyAcc*)

have *sgA12*:*sA12* ∉ *Sources level1 sA22* **by** (*metis A12-NotSource-level1 A2level1 isNotSource-Sources*)
have *sgA21*:*sA21* ∉ *Sources level1 sA22*
by (*metis A21-NotSource-level1 DAcc-DSourcesNOT NDSourceExistsDSource empty-iff isNotDSource-EmptyDAcc*)
from *A2level1* **have** *sgA6*:*sA6* ∉ *Sources level1 sA22* **by** (*simp add*: *A6-NSources-L1*)
from *A2level1* **have** *sgA71*:*sA71* ∉ *Sources level1 sA22* **by** (*simp add*: *A71-NSources-L1*)
from *A2level1* **have** *sgA72*:*sA72* ∉ *Sources level1 sA22* **by** (*simp add*: *A72-NSources-L1*)
from *A2level1* **have** *sgA81*:*sA81* ∉ *Sources level1 sA22* **by** (*simp add*: *A81-NSources-L1*)
from *A2level1* **have** *sgA82*:*sA82* ∉ *Sources level1 sA22* **by** (*simp add*: *A82-NSources-L1*)
from *A2level1* **have** *sgA91*:*sA91* ∉ *Sources level1 sA22* **by** (*simp add*: *A91-NSources-L1*)
from *A2level1* **have** *sgA92*:*sA92* ∉ *Sources level1 sA22* **by** (*simp add*: *A92-NSources-L1*)
from *A2level1* **have** *sgA93*:*sA93* ∉ *Sources level1 sA22* **by** (*metis A93-NotSourceSet-level1*)

have *Sources level1 sA22* ⊆ {*sA11*, *sA12*, *sA21*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*, *sA42*, *sA5*, *sA6*, *sA71*, *sA72*, *sA81*, *sA82*, *sA91*, *sA92*, *sA93*}
by (*metis AbstrLevel1 SourcesLevelX*)
with *sgA5 sgA12 sgA21 sgA42 sgA6 sgA71 sgA72 sgA81 sgA82 sgA91 sgA92 sgA93* **show**
Sources level1 sA22 ⊆ {*sA11*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*}
by *auto*
qed
next
show {*sA11*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*} ⊆ *Sources level1 sA22*
proof −
have *sDef*:(*Sources level1 sA22*) = (*DSources level1 sA22*) ∪ (⋃ *S* ∈ (*DSources level1 sA22*). (*Sources level1 S*))
by (*rule SourcesDef*)

have *A11s*: *sA11* ∈ *Sources level1 sA22* **by** (*metis DSourceIsSource DSourcesA22-L1 insertI1*)
have *A41s*: *sA41* ∈ *Sources level1 sA22* **by** (*metis* (*full-types*) *DSourceIsSource DSourcesA22-L1 insertCI*)
have *A31s*: *sA31* ∈ *Sources level1 sA22*
by (*metis* (*full-types*) *A41s DSourceIsSource DSourcesA41-L1 SourcesTrans insertCI*)
have *A32s*: *sA32* ∈ *Sources level1 sA22*
by (*metis A32-DAcc-level1 A41s DAcc-DSourcesNOT DSourceOfSource insertI1*)
have *A23s*: *sA23* ∈ *Sources level1 sA22* **by** (*metis A32s DSourceOfSource DSourcesA32-L1 insertI1*)
have *A22s*: *sA22* ∈ *Sources level1 sA22* **by** (*metis A31s DSourceOfSource DSourcesA31-L1 insertI1*)
with *A11s A22s A23s A31s A32s A41s* **show** *?thesis* **by** *auto*
qed
qed

lemma *SourcesA23-L1*: *Sources level1 sA23* = {*sA11*}
by (*simp add*: *DSourcesA23-L1 SourcesA11-L1 Sources-singleDSource*)

lemma *SourcesA31-L1*: *Sources level1 sA31* = {*sA11*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*}
by (*metis DSourcesA31-L1 SourcesA22-L1 Sources-singleDSource Un-insert-right insert-absorb2 insert-is-Un*)

lemma *SourcesA32-L1*: *Sources level1 sA32* = {*sA11*, *sA23*}
by (*metis DSourcesA32-L1 SourcesA23-L1 Sources-singleDSource Un-insert-right insert-is-Un*)

lemma *SourcesA41-L1*: *Sources level1 sA41* = {*sA11*, *sA22*, *sA23*, *sA31*, *sA32*, *sA41*}
by (*metis DSourcesA41-L1 SourcesA31-L1 SourcesA32-L1 Sources-2DSources Un-absorb Un-commute Un-insert-left*)

lemma *SourcesA42-L1*: *Sources level1 sA42* = {}
by (*simp add*: *DSourcesA42-L1 DSourcesEmptySources*)

lemma *SourcesA5-L1*: *Sources level1 sA5* = {*sA42*}
by (*simp add*: *DSourcesA5-L1 SourcesA42-L1 Sources-singleDSource*)

lemma *SourcesA6-L1*: *Sources level1 sA6* = {}
by (*simp add*: *DSourcesA6-L1 DSourcesEmptySources*)

lemma *SourcesA71-L1*: *Sources level1 sA71* = {*sA6*}
by (*metis DSourcesA71-L1 SourcesA6-L1 SourcesEmptyDSources SourcesOnlyDSources singleton-iff*)

lemma *SourcesA81-L1*: *Sources level1 sA81* = {*sA6*, *sA71*, *sA81*, *sA91*}

proof −
have *dA81*:*DSources level1 sA81* = {*sA71*, *sA91*} **by** (*rule DSourcesA81-L1*)
have *dA91*:*DSources level1 sA91* = {*sA81*} **by** (*rule DSourcesA91-L1*)
have (*Sources level1 sA81*) = (*DSources level1 sA81*) ∪ (⋃ *S* ∈ (*DSources level1 sA81*). (*Sources level1 S*))
by (*rule SourcesDef*)
with *dA81* **have** (*Sources level1 sA81*) = ({*sA71*, *sA91*} ∪ (*Sources level1 sA71*) ∪ (*Sources level1 sA91*))
by (*metis* (*hide-lams*, *no-types*) *SUP-empty UN-insert Un-insert-left sup-bot.left-neutral sup-commute*)
hence *sourcesA81*:(*Sources level1 sA81*) = ({*sA71*, *sA91*, *sA6*} ∪ (*Sources level1 sA91*))
by (*metis SourcesA71-L1 insert-is-Un sup-assoc*)
have (*Sources level1 sA91*) = (*DSources level1 sA91*) ∪ (⋃ *S* ∈ (*DSources level1 sA91*). (*Sources level1 S*))
by (*rule SourcesDef*)
with *dA91* **have** (*Sources level1 sA91*) = ({*sA81*} ∪ (*Sources level1 sA81*)) **by** *simp*
with *sourcesA81* **have** (*Sources level1 sA81*) = {*sA71*, *sA91*, *sA6*} ∪ {*sA81*} ∪ {*sA81*, *sA91*}
by (*metis SourcesLoop*)
thus *?thesis* **by** *auto*
qed

lemma *SourcesA91-L1*: *Sources level1 sA91* = {*sA6*, *sA71*, *sA81*, *sA91*}
proof −
have *DSources level1 sA91* = {*sA81*} **by** (*rule DSourcesA91-L1*)
thus *?thesis* **by** (*metis SourcesA81-L1 Sources-singleDSource Un-empty-left Un-insert-left insert-absorb2 insert-commute*)
qed

lemma *SourcesA92-L1*: *Sources level1 sA92* = {*sA6*, *sA71*, *sA81*, *sA91*}
by (*metis DSourcesA91-L1 DSourcesA92-L1 SourcesA91-L1 Sources-singleDSource*)

lemma *SourcesA72-L1*: *Sources level1 sA72* = {*sA6*}
by (*metis DSourcesA6-L1 DSourcesA72-L1 SourcesOnlyDSources singleton-iff*)

lemma *SourcesA82-L1*: *Sources level1 sA82* = {*sA6*, *sA72*}
proof −
have *dA82*:*DSources level1 sA82* = {*sA72*} **by** (*rule DSourcesA82-L1*)
have (*Sources level1 sA82*) = (*DSources level1 sA82*) ∪ (⋃ *S* ∈ (*DSources level1 sA82*). (*Sources level1 S*))
by (*rule SourcesDef*)
with *dA82* **have** (*Sources level1 sA82*) = {*sA72*} ∪ (*Sources level1 sA72*) **by** *simp*
thus *?thesis* **by** (*metis SourcesA72-L1 Un-commute insert-is-Un*)
qed

lemma *SourcesA93-L1*: *Sources level1 sA93* = {*sA6*, *sA72*, *sA82*}
by (*metis DSourcesA93-L1 SourcesA82-L1 Sources-singleDSource Un-insert-right insert-is-Un*)

— Abstraction level 2

lemma *SourcesS1-L2*: *Sources level2 sS1* = {}
proof −
have *DSources level2 sS1* = {} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
thus *?thesis* **by** (*simp add*: *DSourcesEmptySources*)
qed

lemma *SourcesS2-L2*: *Sources level2 sS2* = {}
proof −
have *DSources level2 sS2* = {} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
thus *?thesis* **by** (*simp add*: *DSourcesEmptySources*)
qed

lemma *SourcesS3-L2*: *Sources level2 sS3* = {*sS2*}
proof −
have *DSourcesS3*:*DSources level2 sS3* = {*sS2*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS2* = {} **by** (*rule SourcesS2-L2*)
with *DSourcesS3* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS4-L2*: *Sources level2 sS4* = {*sS2*}
proof −
have *DSourcesS4*:*DSources level2 sS4* = {*sS2*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS2* = {} **by** (*rule SourcesS2-L2*)
with *DSourcesS4* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS5-L2*: *Sources level2 sS5* = {*sS2*, *sS4*}
proof −
have *DSourcesS5*:*DSources level2 sS5* = {*sS4*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS4* = {*sS2*} **by** (*rule SourcesS4-L2*)
with *DSourcesS5* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS6-L2*: *Sources level2 sS6* = {*sS2*, *sS4*, *sS5*}
proof −
have *DSourcesS6*:*DSources level2 sS6* = {*sS2*, *sS5*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *SourcesS2*:*Sources level2 sS2* = {} **by** (*rule SourcesS2-L2*)

have *Sources level2 sS5* = {*sS2*, *sS4*} **by** (*rule SourcesS5-L2*)
with *SourcesS2 DSourcesS6* **show** *?thesis* **by** (*simp add*: *Sources-2DSources*, *auto*)
qed

lemma *SourcesS7-L2*: *Sources level2 sS7* = {}
proof −
have *DSources level2 sS7* = {} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
thus *?thesis* **by** (*simp add*: *DSourcesEmptySources*)
qed

lemma *SourcesS8-L2*:
Sources level2 sS8 = {*sS7*}
proof −
have *DSourcesS8*:*DSources level2 sS8* = {*sS7*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS7* = {} **by** (*rule SourcesS7-L2*)
with *DSourcesS8* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS9-L2*:
Sources level2 sS9 = {}
proof −
have *DSources level2 sS9* = {} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
thus *?thesis* **by** (*simp add*: *DSourcesEmptySources*)
qed

lemma *SourcesS10-L2*: *Sources level2 sS10* = {*sS9*}
proof −
have *DSourcesS10*:*DSources level2 sS10* = {*sS9*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS9* = {} **by** (*rule SourcesS9-L2*)
with *DSourcesS10* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS11-L2*: *Sources level2 sS11* = {*sS9*}
proof −
have *DSourcesS11*:*DSources level2 sS11* = {*sS9*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS9* = {} **by** (*rule SourcesS9-L2*)
with *DSourcesS11* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS12-L2*: *Sources level2 sS12* = {*sS9*, *sS10*}
proof −
have *DSourcesS12*:*DSources level2 sS12* = {*sS10*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS10* = {*sS9*} **by** (*rule SourcesS10-L2*)
with *DSourcesS12* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)

qed

lemma *SourcesS13-L2*: *Sources level2 sS13* = {*sS9*, *sS10*, *sS12*}
proof −
have *DSourcesS13*:*DSources level2 sS13* = {*sS12*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS12* = {*sS9*, *sS10*} **by** (*rule SourcesS12-L2*)
with *DSourcesS13* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS14-L2*: *Sources level2 sS14* = {*sS9*, *sS11*}
proof −
have *DSourcesS14*:*DSources level2 sS14* = {*sS11*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS11* = {*sS9*} **by** (*rule SourcesS11-L2*)
with *DSourcesS14* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

lemma *SourcesS15-L2*: *Sources level2 sS15* = {*sS9*, *sS11*, *sS14*}
proof −
have *DSourcesS15*:*DSources level2 sS15*= {*sS14*} **by** (*simp add*: *DSources-def AbstrLevel2*, *auto*)
have *Sources level2 sS14* = {*sS9*, *sS11*} **by** (*rule SourcesS14-L2*)
with *DSourcesS15* **show** *?thesis* **by** (*simp add*: *Sources-singleDSource*)
qed

4.5 Minimal sets of components to prove certain properties

lemma *minSetOfComponentsTestL2p1*:
minSetOfComponents level2 {*data10*, *data13*} = {*sS1*}
proof −
have *outL2*:*outSetOfComponents level2* {*data10*, *data13*} = {*sS1*}
by (*simp add*: *outSetOfComponents-def AbstrLevel2*, *auto*)
have *Sources level2 sS1* = {} **by** (*simp add*: *SourcesS1-L2*)
with *outL2* **show** *?thesis* **by** (*simp add*: *minSetOfComponents-def*)
qed

lemma *NOT-noIrrelevantChannelsTestL2p1*:
¬ *noIrrelevantChannels level2* {*data10*, *data13*}
by (*simp add*: *noIrrelevantChannels-def systemIN-def minSetOfComponentsTestL2p1 AbstrLevel2*)

lemma *NOT-allNeededINChannelsTestL2p1*:
¬ *allNeededINChannels level2* {*data10*, *data13*}
by (*simp add*: *allNeededINChannels-def minSetOfComponentsTestL2p1 systemIN-def AbstrLevel2*)

lemma *minSetOfComponentsTestL2p2*:
minSetOfComponents level2 {*data1*, *data12*} = {*sS2*, *sS4*, *sS5*, *sS6*}

proof −
have *outL2*:*outSetOfComponents level2* {*data1*, *data12*} = {*sS6*}
by (*simp add*: *outSetOfComponents-def AbstrLevel2*, *auto*)
have *Sources level2 sS6* = {*sS2*, *sS4*, *sS5*}
by (*simp add*: *SourcesS6-L2*)
with *outL2* **show** *?thesis*
by (*simp add*: *minSetOfComponents-def*)
qed

lemma *noIrrelevantChannelsTestL2p2*:
noIrrelevantChannels level2 {*data1*, *data12*}
by (*simp add*: *noIrrelevantChannels-def systemIN-def minSetOfComponentsTestL2p2 AbstrLevel2*)

lemma *allNeededINChannelsTestL2p2*:
allNeededINChannels level2 {*data1*, *data12*}
by (*simp add*: *allNeededINChannels-def minSetOfComponentsTestL2p2 systemIN-def AbstrLevel2*)

lemma *minSetOfComponentsTestL1p3*:
minSetOfComponents level1 {*data1*, *data10*, *data11*} = {*sA12*, *sA11*, *sA21*}
proof −
have *sg1*:*outSetOfComponents level1* {*data1*, *data10*, *data11*} = {*sA12*, *sA21*}
by (*simp add*: *outSetOfComponents-def AbstrLevel1*, *auto*)
have *DSources level1 sA12* = {}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)
hence *sg2*:*Sources level1 sA12* = {}
by (*simp add*: *DSourcesEmptySources*)
have *sg3*:*DSources level1 sA21* = {*sA11*}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)
have *sg4*:*DSources level1 sA11* = {}
by (*simp add*: *DSources-def AbstrLevel1*, *auto*)
hence *Sources level1 sA21* = {*sA11*}
by (*metis SourcesOnlyDSources sg3 singleton-iff*)
from *this* **and** *sg1* **and** *sg2* **show** *?thesis*
by (*simp add*: *minSetOfComponents-def*, *blast*)
qed

lemma *noIrrelevantChannelsTestL1p3*:
noIrrelevantChannels level1 {*data1*, *data10*, *data11*}
by (*simp add*: *noIrrelevantChannels-def systemIN-def minSetOfComponentsTestL1p3 AbstrLevel1*)

lemma *allNeededINChannelsTestL1p3*:
allNeededINChannels level1 {*data1*, *data10*, *data11*}
by (*simp add*: *allNeededINChannels-def minSetOfComponentsTestL1p3 systemIN-def AbstrLevel1*)

lemma *minSetOfComponentsTestL2p3*:

minSetOfComponents level2 {*data1*, *data10*, *data11*} = {*sS1*, *sS2*, *sS3*}
proof −
have *sg1*:*outSetOfComponents level2* {*data1*, *data10*, *data11*} = {*sS1*, *sS3*}
by (*simp add*: *outSetOfComponents-def AbstrLevel2*, *auto*)
have *sS1*:*Sources level2 sS1* = {} **by** (*simp add*: *SourcesS1-L2*)
have *Sources level2 sS3* = {*sS2*} **by** (*simp add*: *SourcesS3-L2*)
with *sg1 sS1* **show** *?thesis*
by (*simp add*: *minSetOfComponents-def*, *blast*)
qed

lemma *noIrrelevantChannelsTestL2p3*:
noIrrelevantChannels level2 {*data1*, *data10*, *data11*}
by (*simp add*: *noIrrelevantChannels-def systemIN-def minSetOfComponentsTestL2p3 AbstrLevel2*)

lemma *allNeededINChannelsTestL2p3*:
allNeededINChannels level2 {*data1*, *data10*, *data11*}
by (*simp add*: *allNeededINChannels-def minSetOfComponentsTestL2p3 systemIN-def AbstrLevel2*)

end

References

[1] J. C. Blanchette, S. Böhme, and L. C. Paulson. Extending Sledgehammer with SMT solvers. In *Journal of Automated Reasoning* 51(1), pp. 109–128, 2013

[2] J. C. Blanchette, A. Popescu, D. Wand, and C. Weidenbach. More SPASS with Isabelle – Superposition with hard sorts and configurable simplification. In *3rd International Conference on Interactive Theorem Proving (ITP 2012)* 51(1), LNCS 7406, pp. 345–360, Springer, 2012.

[3] M. Broy. Compositional refinement of interactive systems modelled by relations. *COMPOS'97: Revised Lectures from the International Symposium on Compositionality: The Significant Difference*, pages 130–149, 1998.

[4] J. Barnat, J. Chaloupka, and J. van de Pol. Improved distributed algorithms for SCC decomposition. *Electron. Notes Theor. Comput. Sci.*, 198(1):63–77, 2008.

[5] L. Fleischer, B. Hendrickson, and A. Pnar. On identifying strongly connected components in parallel. In J. Rolim, editor, *Parallel and Distributed Processing*, vol. 1800 of *LNCS*, pages 505–511. Springer, 2000.

[6] T. Nipkow, L. C. Paulson, and M. Wenzel. *Isabelle/HOL – A Proof Assistant for Higher-Order Logic*, volume 2283 of *LNCS*. Springer, 2002.

[7] S. M. Orzan. *On Distributed Verification and Verified Distribution*. PhD thesis, Free University of Amsterdam, 2004.

[8] M. Spichkova, H. Schmidt, and I. Peake. *From abstract modelling to remote cyberphysical integration/interoperability testing*. In *Improving Systems and Software Engineering Conference (iSSEC)*, 2013.

[9] M. Spichkova. Stream Processing Components: Isabelle/HOL Formalisation and Case Studies. *Archive of Formal Proofs*, Nov. 2013.

[10] M. Spichkova and A. Campetelli. *Towards system development methodologies: From software to cyber-physical domain*. In *International Workshop on Formal Techniques for Safety-Critical Systems*, 2012.

[11] M. Spichkova. Architecture: Requirements + Decomposition + Refinement. *Softwaretechnik-Trends*, 31:4, 2011.

[12] M. Spichkova. Refinement-based verification of interactive real-time systems. *Electronic Notes in Theoretical Computer Science*, volume 214, pages 131–157. Elsevier, 2008.

[13] M. Wenzel. *The Isabelle/Isar Reference Manual*. TU München, 2013.